

VERIFICATION OF TRANSLATION


Translation of the certified copy of:

Japanese Patent Application No. 2001- 115864

Filed in JAPAN on April 13, 2001

I, Ayumi NISHINO, of FURUYA INTERNATIONAL PATENT OFFICE of Dai2 Meiho Building, 9th Floor, 19-5, Nishi-Shinjuku 1-Chome, Shinjuku-ku, Tokyo 160-0023 JAPAN, an fully conversant with the English and Japanese languages, hereby certify that to the best of my knowledge and belief the following is a true translation into the English language of the above documents, which has been made by me and for which I accept responsibility.

Signed this 12th day of January, 2006

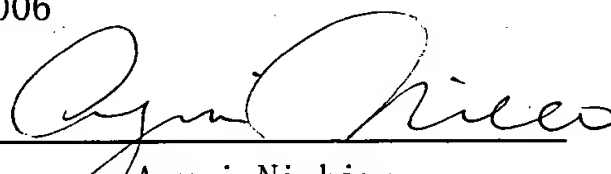
Ayumi Nishino

Identification Number= 0001276

2001-115864

Page: 1 of 1

[Document Name]	Patent Application	
[Identification Number]	0001276	
[Date of Submission]	April 13, 2001	
[Addressee]	Commissioner of Patents	
[International Patent Code]	G08B 29/06	
[Title of the Invention]	xDSL Modem	
[Number of Claims]	5	
[Inventor]		
[Address or Domicile]	c/o Fujitsu Limited 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211- 8588 Japan	
[Name or Title]	Yasuhiro Arai	
[Patent Applicant]		
[Identification Number]	000005223	
[Name or Title]	Fujitsu Limited	
[Representative]		
[Identification Number]	100072718	
[Patent Attorney]		
[Name or Title]	Fumio Furuya	
[Telephone Number]	3343-2901	
[Identification of Fees]		
[Ledger Number]	013354	
[Amount to be Paid]	21000	
[List of Items Submitted]		
[Name of Item]	Specification	1
[Name of Item]	Drawings	1
[Name of Item]	Abstract	1
[General Power of Attorney Number]	9704947	

[Document Name] Specification

[Title of the Invention] xDSL MODEM

[Claims]

[Claim 1] An xDSL modem used for digital communication through a subscriber line connecting a local switch and a customer premises equipment, and which includes a digital transmitting unit for performing the digital communication using a data signal, the data signal being separated by a splitter from an analog control signal and a speech signal used for a telephone communication by use of an analog transmitting unit, the xDSL modem comprising:

 an evaluating unit for evaluating, prior to a start of a provision of a broadband communication service, a transmission characteristic of said subscriber line based on a reception result of a signal transmitted from said local switch through said subscriber line; and

 a reporting unit for sending out said transmission characteristic obtained by said evaluating unit to a network through said analog transmitting unit.

[Claim 2] The xDSL modem according to claim 1,

 wherein said evaluating unit includes:

 a requiring unit for sending out a predetermined requiring signal to the network through the analog transmitting unit; and

 an analyzing unit for analyzing a reception result of an analog signal according to receipt of a response signal sent back from a provider offering a broadband communication service in response to said requiring signal, the analog signal being generated by said local switch directly connected to said xDSL modem and being transmitted through said subscriber line, and for obtaining an evaluation barometer indicating a transmission characteristic of said subscriber line.

[Claim 3] The xDSL modem according to claim 2,



wherein said analyzing unit includes:

a level measuring unit for measuring a reception level of one of a secondary dial tone and a ringing signal which are transmitted from said local switch; and

a signal loss calculating unit for calculating a transmission loss by a subscriber line between the local switch and the customer premises equipment based on said reception level, and for outputting the transmission loss as a barometer for evaluating a transmission characteristic of said subscriber line.

[Claim 4] The xDSL modem according to claim 1,

wherein said evaluating unit includes:

a current/voltage measuring unit for measuring one of a line current and a voltage, the line current flowing through a subscriber line between the local switch and the xDSL modem in an off-hook state and the voltage between two copper wires forming said subscriber line in a state where said line current flows therethrough; and

a current loss calculating unit for calculating a transmission loss by said subscriber line based on one of an obtained value of the line current and an obtained value of the voltage, and for outputting the transmission loss as a barometer for evaluating a transmission characteristic of said subscriber line.

[Claim 5] The xDSL modem according to claim 1,

wherein said evaluating unit includes:

a noise detecting unit for detecting noises having a reception level of a predetermined threshold value or more, from a signal which is input to the digital transmitting unit provided in the xDSL modem, the signal being separated from an analog signal by the splitter; and

a periodicity examining unit for examining a periodicity of the noises detected by said noise-detecting unit and for outputting an obtained examination result as a barometer for evaluating a transmission characteristic of said subscriber line.

[Detailed Description of the Invention]

[0001]

[Field of the Invention]

The present invention relates to a system which comprises a line characteristic estimating function for estimating characteristics of a telephone line connected thereto, when broadband communication services using an xDSL (x digital subscriber line) technology are provided.

The xDSL technology is capable of transmitting data of several mega bits per one second at a high speed by use of a metal wire such as an existing telephone wire, and hence the xDSL technology has lately attracted a considerable attention as a communication system in stead of an analog modem. The xDSL technology includes HDSL (high bit rate DSL) technology, SDSL (single line DSL) technology, RADSL (rate adaptive DSL) technology, VSDL (very high bit rate DSL) technology, and ADSL (asymmetric DSL) technology; and among these technologies, the ADSL technology is particularly attractive because its asymmetric transmission capacity is suitable for an Internet access and standardization of technical specifications is advanced. Popularization of a broadband communication service using the ADSL modem has been expected.

[0002]

[Description of the Related Art]

Fig. 10 shows a constitution example of a communication system which provides broadband communication services by use of an ADSL technology.

Referring to Fig. 10, an ADSL modem 411 and a telephone set 412 installed in a subscriber's home are connected to a subscriber line through a splitter 413, respectively. The subscriber line is connected to a splitter 401 installed in a central office, and signals that

have arrived at the central office through the subscriber line are divided by the splitter 401 into a signal of a frequency band used in a plain old telephone system (POTS) and a signal of a frequency band used in the xDSL technology. Analog signals for POTS are delivered to a local switch 402.

[0003]

Furthermore, in the central office shown in Fig. 10, an ADSL modem 403 is installed by a provider providing broadband communication services by the ADSL (hereinafter simply referred to as broadband communication services). The ADSL modem 403 faces the ADSL modem on the subscriber side. The modulated-analog signal of the frequency band separated by the above-described splitter 401 is converted to a digital data signal by the ADSL modem 403, and thereafter is delivered to a router 404 (or an ATM switching system). Then, the digital signal data is delivered from the router 404 to a server of the provider through a predetermined data channel. Moreover, the digital data signal sent to a user from the server of the provider is delivered to the ADSL modem 403 from the router 404 through a reversed path in the data channel, and is converted to a modulated-analog signal by the ADSL modem 403. The modulated-analog signal is then sent out to the subscriber line through the splitter 401.

[0004]

In the conventional broadband communication service, when a contract is made between a subscriber of NTT's telephone system and a provider providing a broadband communication service, a request for a construction is issued to NTT from the provider. A work in which a connection of a subscriber line of a customer with the local switch 402 provided for the plain old telephone system (POTS) is changed to that with the ADSL modem 403 is performed in a central office by NTT. Subsequently, the provider sets up an ADSL modem exclusively used for the broadband communication services provided by the provider

in a subscriber's home, and then performs a connection check of the ADSL modem.

[0005]

As a result of this connection check, when it is proved that a good service quality is acquired in the subscriber line connected to the subscriber's home, the subscriber can accept the provision of the broadband communication service by use of the ADSL modem.

On the contrary, when it is proved that a predetermined service quality cannot be acquired in the subscriber line connected to the subscriber's home, on the subscriber line a worker sent from the provider performs an operation for measuring characteristics of the subscriber line in order to investigate causes leading to deterioration of the service quality.

[0006]

Generally, as the principal cause which deteriorates the service quality in the ADSL modem, assigned are transmission loss in proportion to a line length of the subscriber line between the subscriber's home and the central office, and cyclic noises accompanied by provision of time compression multiplexing-ISDN services in Japan. Accordingly, by measuring the transmission loss and the existence of the cyclic noises on the subscriber line and an intensity of the cyclic noises, it is possible to assign the cause of the deterioration of the service quality. Depending on the assigned cause and a degree thereof, it can be decided whether or not the provision of the broadband communication services is possible, and a necessary countermeasure can be decided if the provision of the broadband communication services is possible.

[0007]

When, based on the measurement results of the above-described line characteristics, it is decided that the provision of the broadband communication services is possible, a necessary countermeasure is taken, which is performed, for example, in such a manner that the provider makes a request to NTT for changing a connection of the subscriber line

connected to the subscriber's home. After the service quality required for the services is secured, the provision of the broadband communication services is begun.

[0008]

Contrary to this, the service quality cannot sometimes be expected to be improved even by changing the connection of the subscriber line, in cases where there are frequency noises, caused by crosstalk from subscriber lines constituting the same quad as corresponding subscriber lines, are generated.

In such a case, the provider consults with the customer, and decides whether to provide services with limited transmission capacity or to abandon the provision of the broadband communication service itself.

[0009]

As a technology for achieving coexistence of ADSL and ISDN, for example, there have been one used by applying Annex. C by ITU to G. lite and G. dmt that are international standard specs. Concerning G. lite and G. dmt, Annex. C respectively prescribes a spec that adjusts a transmission rate by ADSL so as to synchronize with clocks of ISDN having 400 Hz. In Annex. C, two kinds of modes are prescribed. One is a DBM mode that makes the transmission rate low during the period when a near-end crosstalk power is large; and the other is a FBM mode that performs a transmission by using only the period when the near-end crosstalk power is small. In any case, since the transmission capacity during the period when the near-end crosstalk power is large is drastically restricted, a decrease in the transmission capacity as a whole is inevitable. However, interference by ISDN can be suppressed to the minimum.

[0010]

[Problem to be Solved by the Invention]

As described above, in the conventional procedures in which the broadband

communication service is set up, it is unclear whether or not the service quality in the subscriber line of the customer satisfies the required conditions for providing the broadband communication services, until the ADSL modem is installed in the customer's home and the connection check of the ADSL modem is performed. Moreover, even if the causes deteriorating the service quality are assigned by performing the work for measuring the line characteristics, it is not always possible to remove the causes. Specifically, there is a possibility that the service does not come to be provided in spite of costs and man-hours spent until then.

[0011]

Recently, a case is observed, in which the ADSL modem is sent to the customer, and entrusts the work for setting up the ADSL modem and the work of the connection test for the ADSL modem, thus attempting to decrease man-hours concerning the set-up work. However, also in this case, when the predetermined level of service quality cannot be acquired by the subscriber line of the customer, as a matter of course, the provider must send the worker to allow the worker to measure the line characteristics. Accordingly, there occurs considerable costs and a considerable number of working steps.

[0012]

As described above, in the conventional broadband communication services, since no countermeasure to previously obtain various characteristics of the subscriber line used for services to be contracted, a risk that the provider must bear for setting up the broadband communication service is very serious compared to an income earned by a service contract. This has been a large hindrance from the viewpoint of propagation of the broadband communication service using the xDSL technology.

[0013]

The object of the present invention is to provide an xDSL modem capable of

automatically collecting characteristics of a subscriber line connected thereto prior to a start of a broadband communication service.

[0014]

[Means for Solving the Problem]

Fig. 1 shows a block diagram of the principle of xDSL modems in claims 1 to 5.

[0015]

The invention in claim 1 is characterized in that an evaluating unit 111 evaluates a transmission characteristic of a subscriber line based on a receipt result of a signal transmitted from a local switch 101 onto the subscriber line 102, and that a reporting unit 114 sends out the obtained transmission characteristic to a network by use of a function of an analog transmitting unit 106.

In the invention of the present invention, based on the reception result of the signal transmitted onto the subscriber line 102 by the local switch 101, the evaluating unit 111 provided in the xDSL modem 103 automatically measures the transmission characteristic of the subscriber line 102 prior to a start of a provision of a broadband communication service. Furthermore, the reporting unit 114 sends out the measurement result to the network. In such a manner, the transmission characteristic sent out to the network by the reporting unit 114 can be collected by a provider. Thus, the provider can know the transmission characteristic of the subscriber line, to which a service is to be offered, prior to a start of the provision of the service. Accordingly, before a start of a management for the broadband communication service, the provider can examine for individual customers whether or not the broadband communication service can be offered and a range of a service that can be offered to the customer.

[0016]

The invention in claim 2 is characterized in that, in the xDSL modem in claim 1, a

requiring unit 112 provided the evaluating unit 111 sends out a predetermined requiring signal to the network through the analog transmitting unit 106, and an analyzing unit 113 analyzes a reception result of the analog signal returned from the local switch 101 in response to this requiring signal. Accordingly, an evaluation barometer indicating the transmission characteristic of the subscriber line is determined.

[0017]

In the invention in claim 2, the requiring unit sends out a requiring signal to the provider by the POTS, just as an analog signal used for a telephone communication is sent out, and obtains an evaluation barometer indicating the transmission characteristic of the subscriber line, based on the reception result of the analog signal transmitted by the local switch 101 in response to the requiring signal. Here, the line length of the subscriber line 102 connecting the local switch 101 and the xDSL modem 103 can be precisely estimated by making effective use of the fact that a characteristic of the analog signal transmitted from the local switch 101 onto the subscriber line is strictly prescribed by a spec of the local switch 101 and the fact that of a transmission line used generally as a subscriber line, a relation between the line length and an attenuation rate of the analog signal is known.

[0018]

The invention in claim 3 is characterized in that, in the xDSL modem in claim 2, a control signal level measuring unit 121 provided in the analyzing unit 113 measures a reception level of a ringing signal transmitted from the local switch 101 onto the subscriber line or of a secondary dial tone, and a signal loss calculating unit 122 calculates the transmission loss of the analog signal on the subscriber line 102 based on the reception level.

[0019]

In the invention in claim 3, when a ringing signal or a secondary dial tone signal is sent out from the local switch 101 onto the subscriber line 102 in response to a requiring

signal sent out from the requiring unit 112, the control signal level measuring unit 121 can measure a reception level of either the ringing signal or the secondary dial tone signal, and can deliver a measurement result to the signal loss calculating unit 122.

Furthermore, in the xDSL modem in claim 2, a speech signal level measuring unit 123 provided in the analyzing unit 112 measures a reception level of a modulated-analog signal transmitted onto the subscriber line 102 from the local switch 101, and the signal loss calculating unit 122 calculates a transmission loss of the modulated -analog signal on the subscriber line 102 based on this reception level.

[0020]

In case when this type of configuration is adopted, when the modulated-analog signal of 300 Hz to 3.4 kHz, which can be obtained by converting the modulated signal in conformity to the regulation of the recommendation V.90 (hereinafter referred to as a digital modulated signal) by use of the local switch 101, arrives at the xDSL modem 103 through the subscriber line 102 in response to the requiring signal sent out from the requiring unit 112, the speech signal level measuring unit 123 measures a reception level and provides the reception level concerning the modulated-analog signal to the signal loss calculating unit 122. Thus, the signal loss calculating unit 122 can determine the transmission loss of a signal on the subscriber line 102, which has a frequency band (300 Hz to 3.4 kHz) in the foregoing modulated-analog signal.

[0021]

Fig. 2 shows a block diagram of the principle of xDSL modems in claims 4 and 5.

The invention in claim 4 is characterized in that, in the xDSL modem in claim 1, a current/voltage measuring unit 124 provided in the evaluating unit 111 measures a line current or a potential difference between twisted-pair cables caused by this line current, and a current loss calculating unit 125 calculates the transmission loss on the subscriber line 102

based on the obtained current value or the obtained voltage value.

[0022]

In the invention in claim 4, the current/voltage measuring unit 124 measures a local loop current flowing on the subscriber line 102 between the local switch 101 and the xDSL modem 103 in an off-hook state, or alternatively the current/voltage measuring unit 124 measures a voltage between two copper wires forming the subscriber line 102 in a state where the local loop current flows on the subscriber line 102. The current loss calculating unit 125 can then calculate a transmission loss by the subscriber line 102 based on the current value or the voltage value which were determined, and outputs the transmission loss as a barometer for evaluating a transmission characteristic of the subscriber line 102.

[0023]

The invention in claim 5 is characterized in that, in the xDSL modem in claim 1, a noise detecting unit 126 provided in the evaluating unit 111 detects noises having a power equal to a predetermined threshold value or more in a data signal which is separated from the analog signal by the splitter 104 and input to the digital transmitting unit 105, and a periodicity examining unit 127 examines a periodicity of the detected noises.

[0024]

In the invention of claim 5, the periodicity examining unit 127 examines the detected noises detected by noise-detecting unit 126 on whether or not detection timings have a periodicity equivalent to a periodicity of a predetermined synchronous signal, whereby an evaluation barometer of a degree of interference from the ISDN line, which is one of factors having adverse influences on a data communication by use of the xDSL system, can be obtained.

[0025]

[Embodiments of the Invention]

The embodiments of the present invention will be described in detail, by reference to the drawings.

In Fig. 3, an embodiment of an xDSL modem equipment of the present invention is shown.

The xDSL modem equipment 220 shown in Fig. 3 incorporates a splitter 223 and an analog modem section 222. In the xDSL modem equipment 220, the splitter 223 separates signals received through the subscriber line into a digital data signal and a standard voice signal. The splitter 223 delivers the data signal to an xDSL modem section 221 and the standard voice signal to the analog modem section 222 through a network control unit (NCU) 224. Moreover, the standard voice signal sent out to the line through the network control unit 224 by the analog modem section 222 and the data signal sent out to the line by the xDSL modem section 221 are mixed by the splitter 223, and sent out to the subscriber line. In the xDSL modem equipment 220, the xDSL modem section 221 and the analog modem section 222 are connected, for example, to a personal computer (PC) so as to interpose a USB interface 226 therebetween.

[0026]

Furthermore, in the xDSL modem equipment 220 shown in Fig. 3, a line characteristic estimating section 225 monitors the standard voice signal and the digital data signal which are separated and output by the splitter 223. The line characteristic estimating section 225 plays a role to perform a measuring process on a designated standard voice signal and a designated digital data signal based on an instruction received from the personal computer 230 through the USB interface 226 and to inform the obtained measurement result to the personal computer 230 through the USB interface 226.

[0027]

On the other hand, in the personal computer 230 shown in Fig. 3, a modem

controlling section 231 is, for example, realized by executing a program set up in installing of the xDSL modem equipment 220 in the personal computer 230 by use of a central processing unit (CPU) (not shown) provided in the personal computer 230.

[0028]

When an instruction to start a measurement processing for the line characteristic is input to an input/output controlling section 235 through an input equipment 234, a measurement controlling section 232 provided in the modem controlling section 231 receives this instruction through the input/output controlling section 235. In response to this instruction, the measurement controlling section 232 sends out an instruction to measure the line characteristic to the xDSL modem equipment 220 through a USB interface 236 in accordance with procedures to be described later. Furthermore, the measurement controlling section 232 collects, through the USB interface 236, the results measured by the line characteristic estimating section 225 provided in the xDSL modem equipment 220. Based on the measurement results collected by the measurement controlling section 232, a characteristic evaluating section 237 calculates a characteristic value of the line necessary for deciding feasibility of the communication service using the xDSL technology, and delivers the obtained characteristic value to a reporting section 233. The reporting section 233 makes a reporting message including the characteristic value obtained by the characteristic evaluating section 237. The reporting section 233 delivers the reporting message through the USB interface 236 to the analog modem section 222 provided in the xDSL modem equipment 220, and requests the analog modem section 222 to transmit the reporting message. Moreover, the reporting section 233 makes display data for displaying the above-described reporting message, and asks a display controlling section 238 to display the reporting message. Then, the reporting message may be provided to the user through a display device (DP) 239.

[0029]

In the descriptions described below, the USB interface 226 provided in the xDSL modem equipment 220 and the USB interface 236 provided in the personal computer 230 are simply referred to as a USB interface.

[0030]

A detailed constitution of the line characteristic estimating section 225 is shown in Fig.

4.

In the line characteristic estimating section 225 shown in Fig. 4, in response to the instruction received through the USB interface 226, a modulated signal level measuring section 241 measures a level of a modulated signal received by the analog modem section 222, and informs the measurement result to the personal computer 230 through the USB interface 226. In an interference detecting section 242 shown in Fig. 4, a discriminator 243 monitors a signal having a high frequency band, which is received by the xDSL modem section 221, and when the discriminator 243 detects noises showing a predetermined signal level or more, the discriminator 243 outputs a detection signal to inform the occurrence of the noises to a synchronization detecting section 244. A synchronizing signal generator 245 generates a synchronizing signal of a frequency identical to that of a synchronizing signal used for a data transmission by use of ISDN, and supplies the synchronizing signal to the synchronization detecting section 244. The synchronization detecting section 244, based on the synchronizing signal received from the synchronizing signal generator 245 and the detection signal received from the discriminator 243, examines a relation between a period at which the noises showing the predetermined signal level or more are detected by the discriminator 243 and the synchronizing signal, and the synchronization detecting section 244 informs the result to the personal computer 230 through the USB interface 226.

[0031]

Here, when the xDSL modem section 221 is applied the above-described Annex. C,

an element for generating a synchronizing signal of a frequency of 400 Hz used for a data transmission by use of a time compression multiplexing system in Japanese style ISDN is provided. Accordingly, this element can be utilized as the synchronizing signal generator 245.

A correlation between each of the units and the units shown in Fig. 1 and each of the sections shown in Figs. 3 and 4 will be described below.

[0032]

The analog transmitting unit 106 shown in Fig. 1 is realized by the NCU 224 and the analog modem section 222 shown in Fig. 3. The xDSL modem section 221 shown in Fig. 3 is equivalent to the digital transmitting unit 105 shown in Fig. 1. On the other hand, a function of the evaluating unit 111 shown in Fig. 1 is realized in such a manner that the line characteristic estimating section 225 provided in the xDSL modem equipment 220 shown in Fig. 3 performs a transferring/receiving of data with the modem controlling section 231 provided in the personal computer 230 through the USB interface. A function of the requiring unit 112 shown in Fig. 1 is realized in such a manner that through the USB interface, in accordance with a procedure to be described later, the measurement controlling section 232 provided in the modem controlling section 231 shown in Fig. 3 requests the analog modem section 222 and the NCU 224 to transmit a predetermined message. Moreover, a function of the analyzing unit 113 shown in Fig. 1 is realized in such a manner that the line characteristic estimating section 225 provided in the xDSL modem equipment 220 shown in Fig. 3 and the characteristic evaluating section 237 provided in the modem controlling section 231 of the personal computer 230 operate in response to an instruction from the measurement controlling section 232. Still furthermore, a function of the reporting unit 114 shown in Fig. 1 is realized in such a manner that a message made by the reporting section 233 shown in Fig. 3 is transmitted to the xDSL modem equipment 220 through the USB interface, and the analog

modem section 222 is requested to transmit the message. The speech signal level measuring unit 123 shown in Fig. 1 is equivalent to the modulated signal level measuring section 241 shown in Fig. 4, and the signal loss calculating unit 122 is equivalent to the characteristic evaluating section 237 shown in Fig. 3. Furthermore, the discriminator shown in Fig. 4 is equivalent to the noise-detecting unit 126 shown in Fig. 2. A function of the periodicity examining unit 127 shown in Fig. 2 is realized by the synchronizing signal generator 245 and the synchronization detecting section 244 shown in Fig. 4.

[0033]

Note that, the control signal level measuring unit 121 shown in Fig. 1 will be described later.

An operation for measuring the line characteristic will be described in detail below.

A sequence diagram for explaining the operation for measuring the line characteristic is shown in Fig. 5. A flowchart for illustrating the measurement operation is shown in Fig. 6.

Figs. 3 and 4 as well as Figs. 5 and 6 are referred to in the following descriptions.

[0034]

For example, when a predetermined measurement start instruction is input to the personal computer 230 shown in Fig. 3 through the input equipment 234 provided therein, the measurement controlling section 232 provided in the modem controlling section 231 delivers through the USB interface a phone number of a management center set up by the provider to the NCU 224 provided in the xDSL modem equipment 220, and instructs the NCU 224 to call this phone number. In response to this instruction to call the phone number, the NCU 224 performs an ordinary call operation, and a speech path is established between the management center and the subscriber (step 301, see Fig. 5).

[0035]

Here, a transmission path between the xDSL modem equipment 220 provided in the

subscriber's home and the local switch is a general subscriber line, that is, a so-called twisted-pair cable formed by twisting two copper wires. On the other hand, when a modulated-analog signal in conformity with the recommendation V. 90 by ITU is used as a signal for measuring the line characteristic in procedures described later, the transmission path established between the local switch and the management center set up by the provider needs to be a digital line on which a digital signal is transmitted.

[0036]

After a notification of that the establishment of the speech path is completed by a speech path establishment notification as shown in Fig. 5, the measurement controlling section 232 delivers a predetermined signal requiring message to the analog modem section 222 through the USB interface, and instructs the analog modem section 222 to transmit this message to the above-described management center. In response to this instruction, the analog modem section 222 converts the message received from the measurement controlling section 232 to a modulated-analog signal, and sends out the modulated-analog signal to the subscriber line through the NCU 224 and the splitter 223. The modulated-analog signal is transmitted to the management center through the above-described speech path as a requiring signal indicating the above-described signal request message (step 302, see Figs. 5 and 6).

[0037]

Furthermore, at this time, the measurement controlling section 232 instructs the modulated signal level measuring section 241 through the USB interface to measure a signal level of the modulated-analog signal input to the analog modem section 222. On the other hand, as a response signal to the above-described requiring signal, a digital modulated signal obtained by converting predetermined test data in conformity to the regulation of the recommendation V. 90 by ITU is sent out from the management center to the transmission

path, and the digital modulated signal is converted to a modulated analog signal in the local switch. Thereafter, the modulated analog signal arrives at the analog modem section 222 provided in the xDSL modem equipment 220 through the subscribed line (see Fig. 5).

[0038]

At this time, the modulated signal level measuring section 241 measures a signal level of the modulated-analog signal input to the analog modem section 222 (step 303), and informs the measurement result to the measurement controlling section 232 through the USB interface (see Fig. 5).

The measurement controlling section 232 delivers the measurement result, which is informed from the modulated signal level measuring section 241, to the characteristic evaluating section 237, and the characteristic evaluating section 237 calculates a characteristic value indicating a line characteristic of the subscriber line in accordance with the measurement result and the reference value based on the spec of the local switch (step 304, see Fig. 5). For example, when an average value D_{VA} of the signal level of the modulated-analog signal received as the measurement result is divided by the reference value D_{VS} based on the spec of the local switch, an attenuation rate can be obtained as a barometer indicating a transmission loss in the subscriber line. In addition, since a correlation between an attenuation rate and a line length is known in a range including a frequency band of the modulated-analog signal as for a general subscriber line, the line length of the subscriber line from the xDSL modem equipment 220 to the local switch can be obtained based on this correlation and the attenuation rate obtained in accordance with the above-described procedures.

[0039]

Here, the above-described digital modulated signal is transmitted as a digital signal on the transmission path extending from the management center to the local switch

connected to the customer's line, and converted to an analog signal in the local switch for the first time. Then, this analog signal is transmitted to the xDSL modem equipment 220 through the subscriber line. Consequently, since the reception level of the modulated-analog signal measured in the above-described manner simply reflects the transmission loss by the subscriber line from the local switch to the xDSL modem equipment 220, it is possible to precisely evaluate the transmission loss by the subscriber line based on the signal level of the modulated-analog signal.

[0040]

Next, a method of evaluating a characteristic concerning noises leaking to the subscriber line connected to the xDSL modem equipment 220 from other subscriber lines.

For example, after an input of the above-described digital modulated signal is completed, the measurement controlling section 232 instructs, through the USB interface, the discriminator 243 and the synchronization detecting section 244 provided at the interference detecting section 242 of the line characteristic estimating section 225 shown in Fig. 4 to start monitoring of a noise level (see Fig. 5). In response to this instruction, the synchronization detecting section 244, for example, examines how the detection signal received from the discriminator 242 is distributed in one cycle of the synchronizing signal, while changing each of phases of the synchronizing signal received from the synchronizing signal generator 245 (step 305 in Fig. 6). The synchronization detecting section 244 informs the examination result to the measurement controlling section 232 provided in the modem controlling section 231 through the USB interface (see Fig. 5).

[0041]

The characteristic evaluating section 237 receives the examination result from the measurement controlling section 232. Based on the examination result, the characteristic evaluating section 237, for example, calculates a ratio r of the detection signal distributed in

the first half and the second half in one cycle of the synchronizing signal for each of the phases changed in the synchronization detecting section 244 described above. The characteristic evaluating section 237 informs the maximum value R_s of the ratio r to the reporting section 233 as a barometer indicating a synchronization of the synchronizing signal with timings at which noises having a signal power of a predetermined threshold T_h or more frequently mix, that is, a barometer indicating a periodicity of the noises (step 306).

[0042]

Here, when a ISDN line as well as the subscriber line to be measured are accommodated in a unit constituting a telephone cable, it has been known that noises showing a periodic large power, that is, a near-end crosstalk, leak at timings at which upstream data tending from the subscriber of the ISDN line to the local switch is transmitted. Accordingly, by evaluating the periodicity of the noises in conformity to the above-described procedures, it is possible to obtain a barometer for deciding whether or not the ISDN line is accommodated in the unit closely to the subscriber line to be measured.

[0043]

Next, the reporting section 233 makes a reporting message which includes the attenuation rate obtained in the step 304, the estimation value of the line length, and the evaluation value indicating the foregoing periodicity of the noises, and requests the analog modem section 222, through the USB interface, to transmit the reporting message to the management center (see Fig. 5). In response to this request, this message is converted to a modulated-analog signal by the analog modem section 222, and informed to the management center by transmitting via the speech path established between the management center and the analog modem section 222 (step 307 in Fig. 6). Note that, this modulated-analog signal is indicated as a result report signal in Fig. 5.

[0044]

Furthermore, the display controlling section 238 shown in Fig. 3, in response to the request from reporting section 233, allows the display device 239 to display the reporting message thereon (step 308). Thus, information relative to the line characteristic obtained for the subscriber line to be measured can be provided to the user.

On the other hand, the management center that has received the above-described reporting message based on the result report signal estimates a service quality that can be expected when the subscriber line is used, based on each data included in the reporting message. Based on the estimation result, the management center investigate a possibility of the broadband communication service by the use of the xDSL system, a required countermeasure, and a range of the service that can be provided.

[0045]

Moreover, the investigation result obtained in the provider is transmitted to the xDSL modem equipment 220 through the above-described speech path, and received by the analog modem section 222. Thereafter, the investigation result is informed to the modem controlling section 231 (see Fig. 5 and step 309 in Fig. 6).

When the modem controlling section 231 delivers the investigation result informed thereto in the above manner to the input/output controlling section 235 and then instructs the input/output controlling section 235 to output the investigation result (step 310 in Fig. 6), it is possible to provide the investigation result to the user.

[0046]

Thereafter, the modem controlling section 231 instructs the NCU 224 provided in the xDSL modem equipment 220 through the USB interface to disconnect the line (step 311), and thus the processing is finished.

In the above-described manner, prior to the start of the management for the broadband communication service by use of the xDSL system, it is possible to examine

whether or not it is serviceable as described above by the provider of the broadband communication service, based on the reliable measurement result. Thus, personal expenses and the like, which occur owing to sending of a maintenance worker for measuring a line characteristic, can be made unnecessary. Accordingly, when the provider sets up the services, it is possible to drastically reduce a risk born by the provider for providing the broadband communication service by use of the xDSL scheme.

[0047]

Since the provider can precisely estimate, based on the line characteristic obtained as described above, the service quality that the provider can offer, it is possible for the provider to exactly judge a necessary countermeasure and a range of the service that the provider can offer and also to offer services coping with individual customers with careful attention.

As a transmission characteristic of the above-described line, for example, when data indicating a large transmission loss is obtained, as a countermeasure for offering the service, it is possible to decide without fail that a connection of the subscriber line must be changed from a subscriber line showing a much transmission loss to that showing a least transmission loss. Moreover, if a cyclic noise due to the near-end crosstalk from the ISDN equipment is a main cause to deteriorate the service quality, a proposal from the provider to the customer is conceived, which tells that a technology to avoid influences of the cyclic noise (see the recommendation Annex. C of G. lite and G. dmt that is an international standard spec as to the ADSL system by ITU) will be applied, and a service with a communication speed, for example, limited up to 500 kbps will be provided.

[0048]

Thus, it is possible to diversify kinds of services that can be provided by the provider as well as to enable the customers to have a wide selection of services, leading to an improvement of a provision of services for the customer on the whole.

Prior to a contract for the service provision, sufficient information can be transmitted from the provider to the customer by transmitting to the xDSL modem equipment 220 of the customer a proposal fitting to a customer's environment and costs accompanied with the proposal in addition to the investigation result at the provider. Accordingly, troubles relating to the contract can be prevented beforehand.

[0049]

Next, another embodiment of the xDSL modem according to the present invention will be described.

A second embodiment of the xDSL modem according to the present invention is shown in Fig. 7.

In the xDSL modem equipment 220 shown in Fig. 7, the constituent components shown in Fig. 7, which are equivalent to those shown in Figs. 3 and 4, are denoted by the same reference numerals, and descriptions for them are omitted.

The line characteristic estimating section 225 provided in the xDSL modem equipment 220 shown in Fig. 7 comprises a ringing signal-level measuring section 246 instead of the modulated signal level measuring section 241 shown in Fig. 4.

[0050]

The ringing signal-level measuring section 246 is equivalent to the control signal level measuring unit 121 shown in Fig. 1. In response to an instruction received via the USB interface 226, the ringing signal-level measuring section 246 measures a reception level of a ringing signal, when the ringing signal is input to the NCU 224. The ringing signal is the one which is a signaling signal sent out from the local switch to the subscriber line on the signal receipt side, and the ringing signal is obtained by modulating a predetermined voltage value V_{r0} (AC75V) with 16 Hz. Then, the ringing signal-level measuring section 246 sends out the measurement result to the modem controlling section 231 provided in the personal computer

230 through the USB interface 226.

[0051]

In this case, after the measurement controlling section 232 provided in the modem controlling section 231 transmits a requiring signal in the same manner as step 302 shown in Fig. 6, the measurement controlling section 232 instructs the NCU 224 through the USB interface to cut the line, and then the line is once cut off. Thereafter, the measurement controlling section 232 instructs the ringing signal-level measuring section 246 through the USB interface to measure the reception level of the ringing signal, and the measurement controlling section 232 waits the arrival of the ringing signal. In this case, the measurement controlling section 232 transmits a requiring signal including a telephone number of the customer; and in response to this requiring signal, the management center performs a calling operation for designating the telephone number shown in the requiring signal, in stead of an operation to transmit the V. 90 digital modulated signal shown in Fig. 5. Accordingly, the management center allows the local switch to generate the ringing signal, and the local switch sends out the ringing signal onto the corresponding subscriber line.

[0052]

Here, an amplitude of the ringing signal sent out from the local switch onto the subscriber line is very strictly defined. Therefore, procedures for measuring the reception level D_r of the ringing signal are executed in stead of step 302 shown in Fig. 6; and, in stead of the step 303, procedures for estimating the line length of the subscriber line are executed based on an attenuation rate of the ringing signal obtained by dividing the reception level D_r by the foregoing reference voltage value V_{r0} . Thus, the line length of the subscriber line can be very precisely estimated.

[0053]

A third embodiment of the xDSL modem according to the present invention is shown

in Fig. 8.

In the xDSL modem equipment 220 shown in Fig. 8, the constituent components shown in Fig. 8, which are equivalent to those shown in Figs. 3 and 4, are denoted by the same reference numerals, and descriptions for them are omitted.

[0054]

The line characteristic estimating section 225 provided in the xDSL modem equipment 220 shown in Fig. 8 comprises a tone-level measuring section 247 in stead of the modulated signal level measuring section 241 shown in Fig. 4.

The tone-level measuring section 247 is equivalent to the control signal level measuring unit 121 shown in Fig. 1. In response to an instruction received through the USB interface 226, the tone-level measuring section 247 measures a reception level of a secondary dial tone when the secondary dial tone is input to the analog modem section 222. The secondary dial tone is a register signal sent out from the local switch to the subscriber line on the signal receipt side for designating an extension number and the like, and the secondary dial tone is obtained by modulating a predetermined voltage value V_{t0} with a predetermined frequency, for example, 400 Hz. The measurement result is sent out to the modem controlling section 231 provided in the personal computer 230 through the USB interface 226.

[0055]

In this case, in response to the requiring signal, in stead of the V. 90 digital modulated signal shown in Fig. 5, a digital control signal indicating a predetermined extension number is sent out by the management center to the speech path. Based on the digital control signal, the secondary dial tone indicating this extension number is generated by the local switch, and sent out to the subscriber line.

Similarly to the foregoing ringing signal, an amplitude of the secondary dial tone sent out to the subscriber line from the local switch is very strictly defined. Accordingly,

procedures for measuring the reception level D_t of the secondary dial tone are executed in stead of step 302 shown in Fig. 6; and procedures for estimating the line length of the subscriber line are executed based on the attenuation rate of the secondary dial tone obtained by dividing the reception level D_t by the foregoing reference voltage value V_{dt} . Thus, the line length of the subscriber line to be measured can be very precisely estimated.

[0056]

As the control signal measured by the control signal level measuring unit 121 shown in Fig. 1, a signal having an amplitude defined very strictly when it is sent out from the local switch to the subscriber line can be used, besides the ringing signal and the secondary dial tone.

A fourth embodiment of the xDSL modem according to the present invention is shown in Fig. 9.

[0057]

In the xDSL modem equipment 220 shown in Fig. 9, the constituent components shown in Fig. 9, which are equivalent to those shown in Figs. 3 and 4, are denoted by the same reference numerals, and descriptions for them are omitted.

The line characteristic estimating section 225 provided in the xDSL modem equipment 220 shown in Fig. 9 comprises a current measuring section 248 in stead of the modulated signal level measuring section 241 shown in Fig. 4.

[0058]

In response to an instruction received through the USB interface 226, the current measuring section 248 measures a line current, that is, a DC current flowing through a circuit including a constant voltage power source provided in the local switch and a customer premises equipment such as a telephone set and a subscriber line, when a hand set is made to be in an off-hook state. The current measuring section 248 sends out the measurement

result to the modem controlling section 231 provided in the personal computer 230 through the USB interface 226.

[0059]

In this case, the measurement controlling section 232 (see Fig. 3) provided in the modem controlling section 231 instructs the NCU 224 an off-hook operation, and, at the same time, instructs the current measuring section 248 to measure a line current value.

A spec of the constant voltage power source V_s provided in the local switch and a resistivity value of a resistor used for the termination resistance of the subscriber line are very strictly defined; and a relation between a transmission distance in a general subscriber line and a value of the line current is known. Accordingly, procedures for measuring the line current value I_c are executed in stead of step 302 shown in Fig. 6; and procedures are executed in stead of step 303, in which the characteristic evaluating section 237 calculates an attenuation rate by dividing a voltage drop V_c by the power source voltage V_s , the voltage drop V_c being obtained based on the line current value I_c and the termination resistance R_t used for the terminal, and estimates the line length of the subscriber line based on this attenuation rate. Thus, it is possible to very precisely estimate the line length of the subscriber line to be measured.

[0060]

As described above, in response to the instruction input to the measurement controlling section 232 through the USB interface 226, the NCU 224 performs the off-hook operation and the current measuring section 248 measures the value of the line current, whereby a function of the current/voltage measuring unit 124 shown in Fig. 2 is realized. Based on the value of the line current measured by the current measuring section 248, the characteristic evaluating section 237 calculates the attenuation rate in conformity to the foregoing procedures, thus realizing a function of the current loss calculating unit 125 shown

in Fig. 2.

[0061]

The voltage drop V_c due to a flow of the line current through the termination resistor of the subscriber line may be directly measured in such a manner that the line characteristic estimating section 225 is constituted by comprising a voltage measuring section 249 in stead of the current measuring section shown in Fig. 9, and a voltage difference generated between the two copper wires forming the subscriber line is measured in stead of the line current value as described above. Also, the line length of the subscriber line to which the service is to be provided can be very precisely estimated based on the voltage drop V_c by executing the procedures for estimating the line length of the subscriber line.

[0062]

In relation to the above explanation, the following items are further disclosed.

(Appedix 1) In the xDSL modem used for a digital communication through a subscriber line connecting a local switch and a customer premises equipment, the xDSL modem comprising a digital transmitting unit which performs the digital communication using a data signal separated from a speech signal and an analog control signal by a splitter, which are used for a telephone communication by use of an analog transmitting unit, the evaluating unit evaluates a transmission characteristic of the subscriber line based on a reception result concerning a signal transmitted from the local switch through the subscriber line. The reporting unit sends out the transmission characteristic obtained by the evaluating unit to a network through the analog transmitting unit.

[0063]

(Appedix 2) In the xDSL modem described in appendix 1, in the evaluating unit, the requiring unit sends out a predetermined requiring signal to the network through the analog transmitting unit prior to the start of the provision of the broadband communication service.

Corresponding to a response signal returned, by the provider offering the broadband communication service, to the xDSL modem in response to the requiring signal, the analyzing unit analyzes a reception result of an analog signal which is generated by the local switch directly connected to the xDSL modem and transmitted through the subscriber line thereto, and obtains an evaluation barometer indicating the transmission characteristic of the subscriber line.

[0064]

(Appedix 3) In the xDSL modem described in appendix 2, in the analyzing unit, the control signal level measuring unit measures a reception level of a secondary dial tone or a ringing signal transmitted from the local switch. The signal loss calculating unit calculates a transmission loss by the subscriber line between the local switch and the customer premises equipment based on the reception level, and outputs the transmission loss as a barometer for evaluating a transmission characteristic of the subscriber line.

[0065]

(Appendix 4) In the xDSL modem described in appendix 2, in the analyzing unit, the speech signal level measuring unit measures a reception level of a modulated-analog signal transmitted from the local switch in response to a predetermined modulated signal in conformity with the regulation of the recommendation V.90 by ITU. The signal loss calculating unit calculates a transmission loss of the modulated-analog signal, based on the reception level, by the subscriber line between the local switch and the xDSL modem, and outputs the transmission loss as a barometer for evaluating a line characteristic of the subscriber line.

[0066]

(Appendix 5) In the xDSL modem described in appendix 1, prior to a start of the provision of the broadband communication service, the current/voltage measuring unit in the

off-hook state measures the local loop current or a potential difference between twisted-pair cables, which is generated by the local loop current. Then, the current/voltage measuring unit delivers the measurement result to the current loss calculating unit. The current loss calculating unit calculates a loss concerning a DC current as a barometer indicating a transmission loss on the subscriber line, based on the local loop current or the potential difference determined by the measurement.

[0067]

(Appendix 6) In the xDSL modem described in appendix 1, in the evaluating unit, from a signal which is separated from an analog signal by the splitter and is input to the digital transmitting unit provided in the xDSL modem, the noise detecting unit detects noises having a reception level equal to a threshold value or more, prior to a start of the provision of the broadband communication service. The periodicity examining unit examines a periodicity of the noises detected by the noise detecting unit, and outputs the obtained examination result as a barometer for evaluating the transmission characteristic of the subscriber line.

[0068]

[Industrial Effect of the Invention]

As explained above, according to the invention in claim 1, prior to a start of the provision of the broadband communication service by use of the xDSL system, it is possible to automatically measure the transmission loss concerning the signal as the transmission characteristic of the subscriber line connected to the xDSL modem and to transmit the measurement result to the network, by measuring a reception level of a signal transmitted to the subscriber line by the local switch. By this, it is possible, for example, to precisely obtain a line length between a customer premises equipment and a local switch, with a control unit set up by a provider, by collecting a transmission loss concerning an analog signal as a part of

transmission characteristics of a subscriber line connected to an xDSL modem. And, the line length of the subscriber line between the customer premises equipment and the local switch can be precisely obtained by basing on the measured transmission loss of the analog signal. This line length is a very important barometer in estimating service quality of a broadband communication service by a xDSL system. And considering the burden on the provider to send maintenance workers for a measuring work, being able to automatically measure transmission characteristics to transmit the measurement result to the network to determine whether the provider can provide services drastically reduce risks that the provider had in setting up the broadband communication service. By this, the spread of the broadband communication service is strongly promoted.

[0069]

According to the invention in claims 2 and 3, by evaluating the transmission loss in the subscriber lines on analog signals strictly regulated by the model of the local switch, the line length of a subscriber line between a local switch and an xDSL modem can be precisely estimated, and deciding whether or not provision of a broadband communication service by use of an xDSL system is possible. Moreover, if the reception level of the analog modulation signal in conformity to the regulation of the recommendation V.90 is measured, it is possible to measure transmission loss over a wide frequency band, which is very effective in evaluating a service quality that can be expected on a corresponding line.

[0070]

According to the invention in claim 4, prior to a start of provision of the broadband communication service by the xDSL system, it is possible to automatically measure a transmission loss of an analog signal as a transmission characteristic of the subscriber line connected to the xDSL modem by measuring the line current or the voltage between the twisted-pair cables by use of only a function provided therein. Thus, since the line length of

the subscriber line can be estimated, it is no longer necessary to send workers from the provider to measure line length, and a risk that the provider had in setting up services can be drastically reduced.

[0071]

According to the invention of claim 5, prior to a start of provision of the broadband communication service by the xDSL system, the intensities of the noises entered into a metal wire and the periodicity thereof are automatically evaluated as the transmission characteristic of the subscriber line, whereby influences of near-end crosstalk from the ISDN line on service quality can be estimated. This influence on service quality from an ISDN line is a very important barometer in estimating service quality of a broadband communication service by a xDSL system. And considering the burden on the provider to send maintenance workers for a measuring work, being able to automatically measure transmission characteristics drastically reduce risks that the provider had in setting up the broadband communication service. By this, the spread of the broadband communication service is strongly promoted.

[Brief Description of the Drawings]

[Fig. 1]

This figure shows a principle block diagram of xDSL modems according to claims 1 to 3;

[Fig. 2]

This figure shows a principle block diagram of xDSL modems according to claims 4 and 5;

[Fig. 3]

This figure is a diagram showing a first embodiment of an xDSL modem according to the present invention;

[Fig. 4]

This figure is a diagram showing a detailed constitution of the xDSL modem;

[Fig. 5]

This figure is a sequence diagram for explaining an operation to measure a line characteristic;

[Fig. 6]

This figure is a flowchart illustrating the operation to measure the line characteristic;

[Fig. 7]

This figure is a block diagram showing a second embodiment of the xDSL modem according to the present invention;

[Fig. 8]

This figure is a block diagram showing a third embodiment of the xDSL modem according to the present invention;

[Fig. 9]

This figure is a block diagram showing a fourth embodiment of the xDSL modem according to the present invention; and

[Fig. 10]

This figure is a block diagram showing a constitution example of a communication system for providing a broadband communication service by ADSL.

[Explanation on the Reference Numbers]

101 Local switch

102 Subscriber line

103, 220 xDSL modem

104, 223, 401, 413 Splitter

105 Digital transmitting unit

106 Analog transmitting unit

- 111 Evaluating unit
- 112 requiring unit
- 113 Analyzing unit
- 114 Reporting unit
- 121 Control signal level measuring unit
- 122 Signal loss calculating unit
- 123 Speech signal level measuring unit
- 124 Current/voltage measuring unit
- 125 Current loss calculating unit
- 126 Noise detecting unit
- 127 Periodicity examining unit
- 220 xDSL modem equipment
- 221 xDSL modem section
- 222 Analog modem section
- 224 Network control unit (NCU)
- 225 Line characteristic estimating section
- 226, 236 USB interface
- 230, 414 Personal computer (PC)
- 231 Modem controlling section
- 232 Measurement controlling section
- 233 Reporting section
- 233 Report preparing section
- 234 Input equipment
- 235 Input/output controlling section
- 237 Characteristic evaluating section

- 238 Display controlling section
- 239 Display device (DP)
- 241 Modulated signal level measuring section
- 242 Interference detecting section
- 243 Discriminator
- 244 Synchronization detecting section
- 245 Synchronizing signal generator 245
- 246 ringing signal-level measuring section
- 247 Tone-level measuring section
- 248 Current measuring section
- 402 Local switch
- 403 ADSL modem
- 404 Router
- 411 ADSL modem
- 412 Telephone set

[Name of Document] Abstract Document

[Abstract]

[Object] The object is to provide an xDSL modem capable of automatically collecting characteristics of a subscriber line connected thereto prior to a start of a broadband communication service.

[Means of Solving the Problem] In the xDSL modem used for a digital communication through a subscriber line 102 connecting a local switch 101 and a customer premises equipment, the xDSL modem comprising a digital transmitting unit 105 which performs the digital communication using a data signal separated from a speech signal and an analog control signal by a splitter 104, which are used for a telephone communication by use of an analog transmitting unit 106, prior to a start of a provision of a broadband communication service, the evaluating unit 111 evaluates a transmission characteristic of the subscriber line 102 based on a reception result concerning a signal transmitted from the local switch through the subscriber line 102. The reporting unit 114 sends out the transmission characteristic obtained by the evaluating unit 111 to a network through the analog transmitting unit 106.

[Selected Drawing] Fig. 1

Fig. 1

Principle block diagram of xDSL modems according to claims 1 to 3

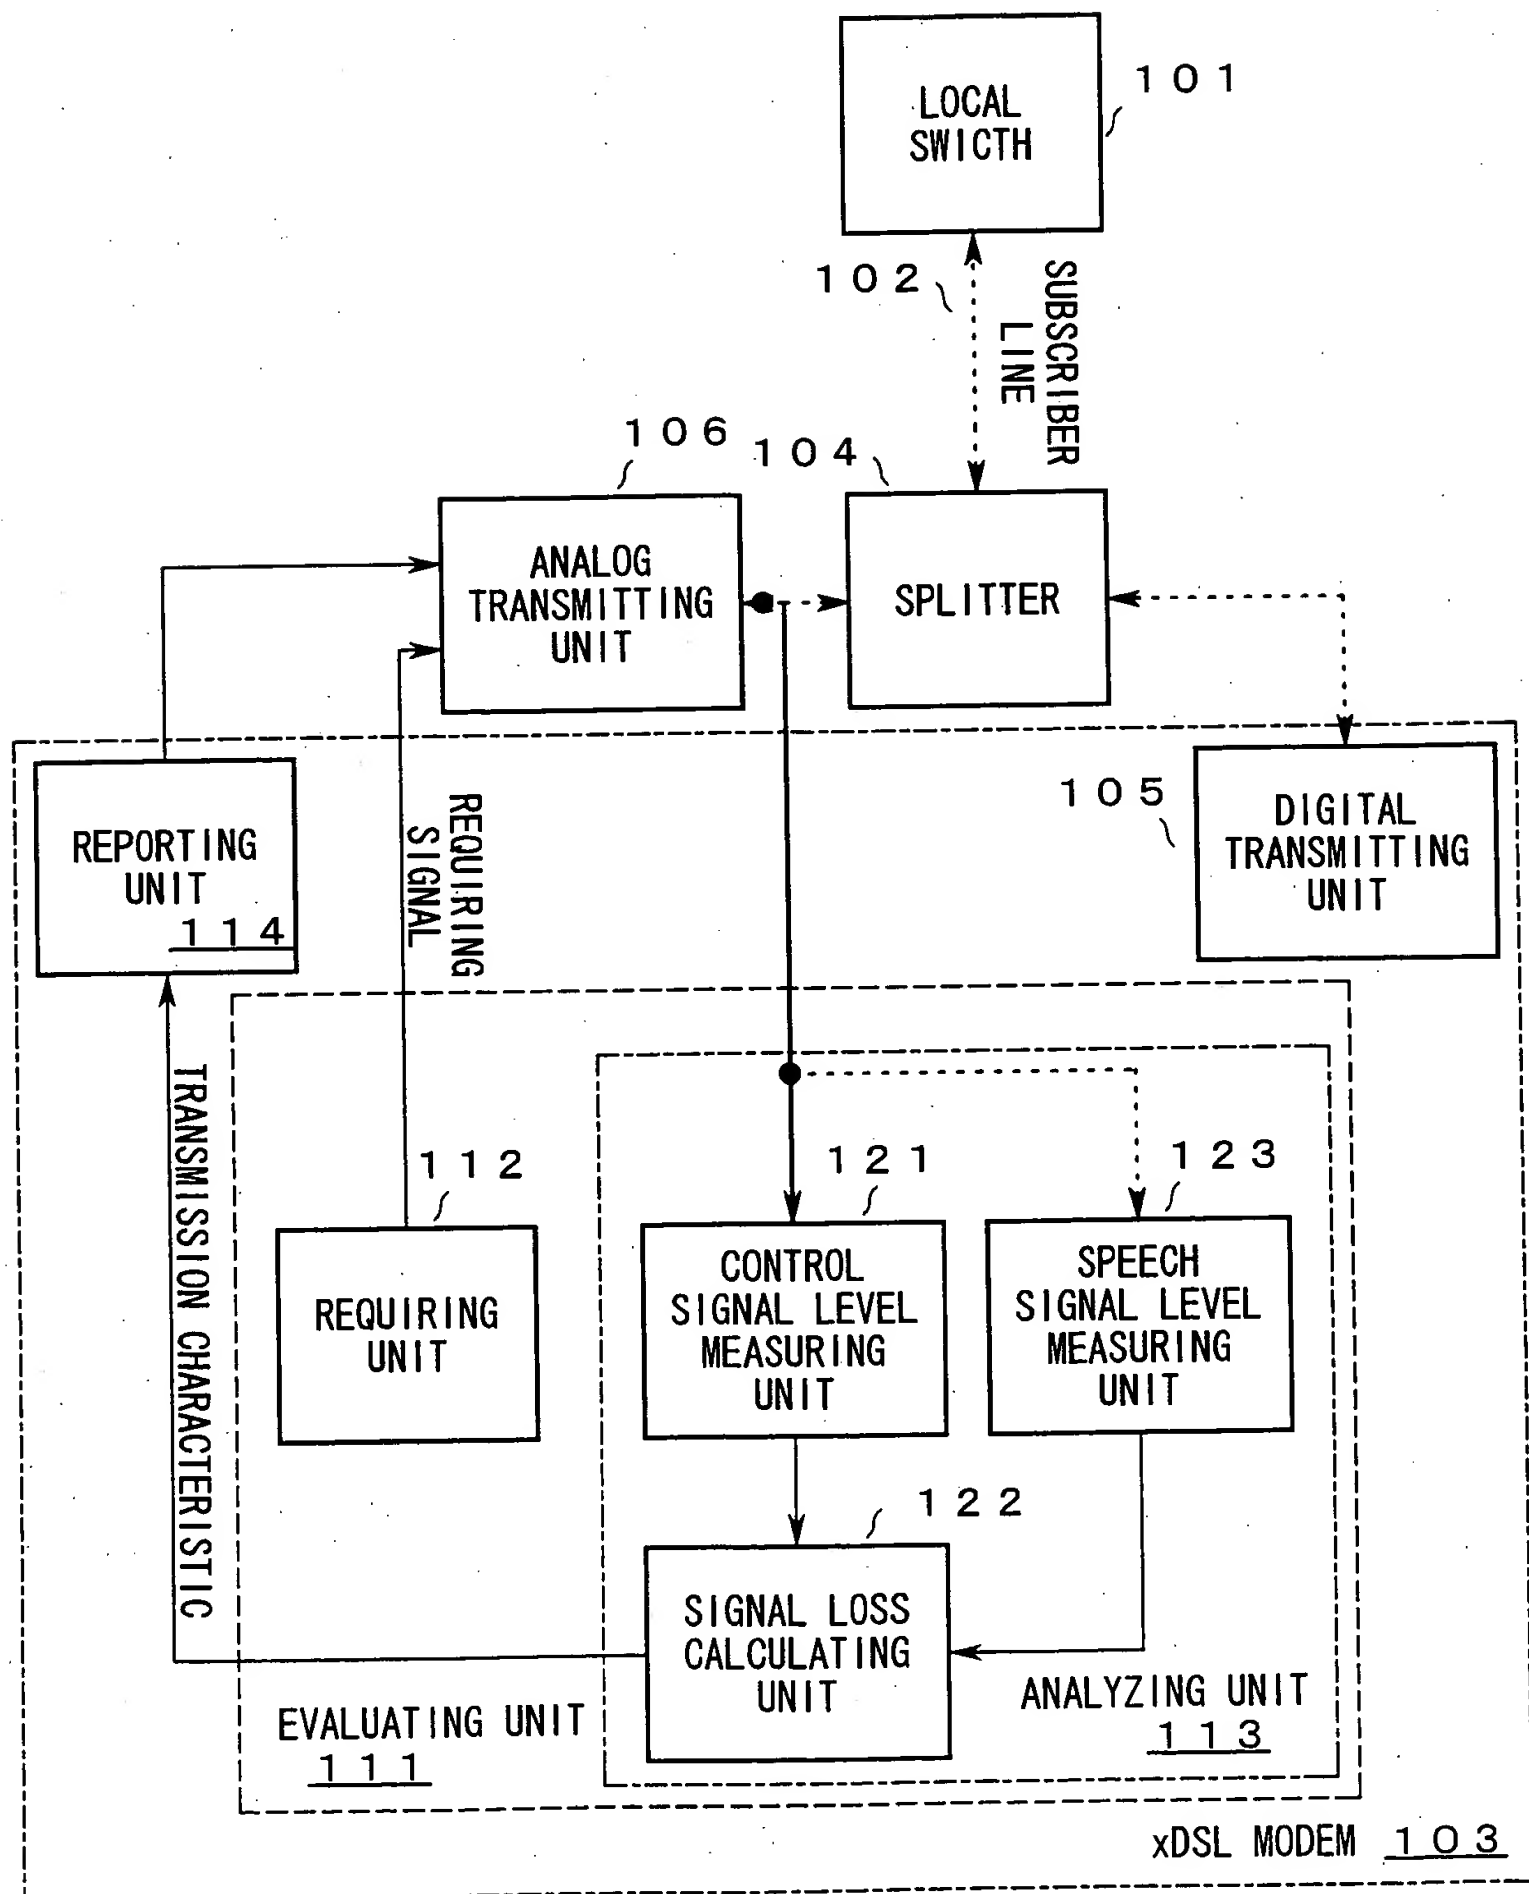


Fig. 2

Principle block diagram of xDSL modems according to claims 4 and 5

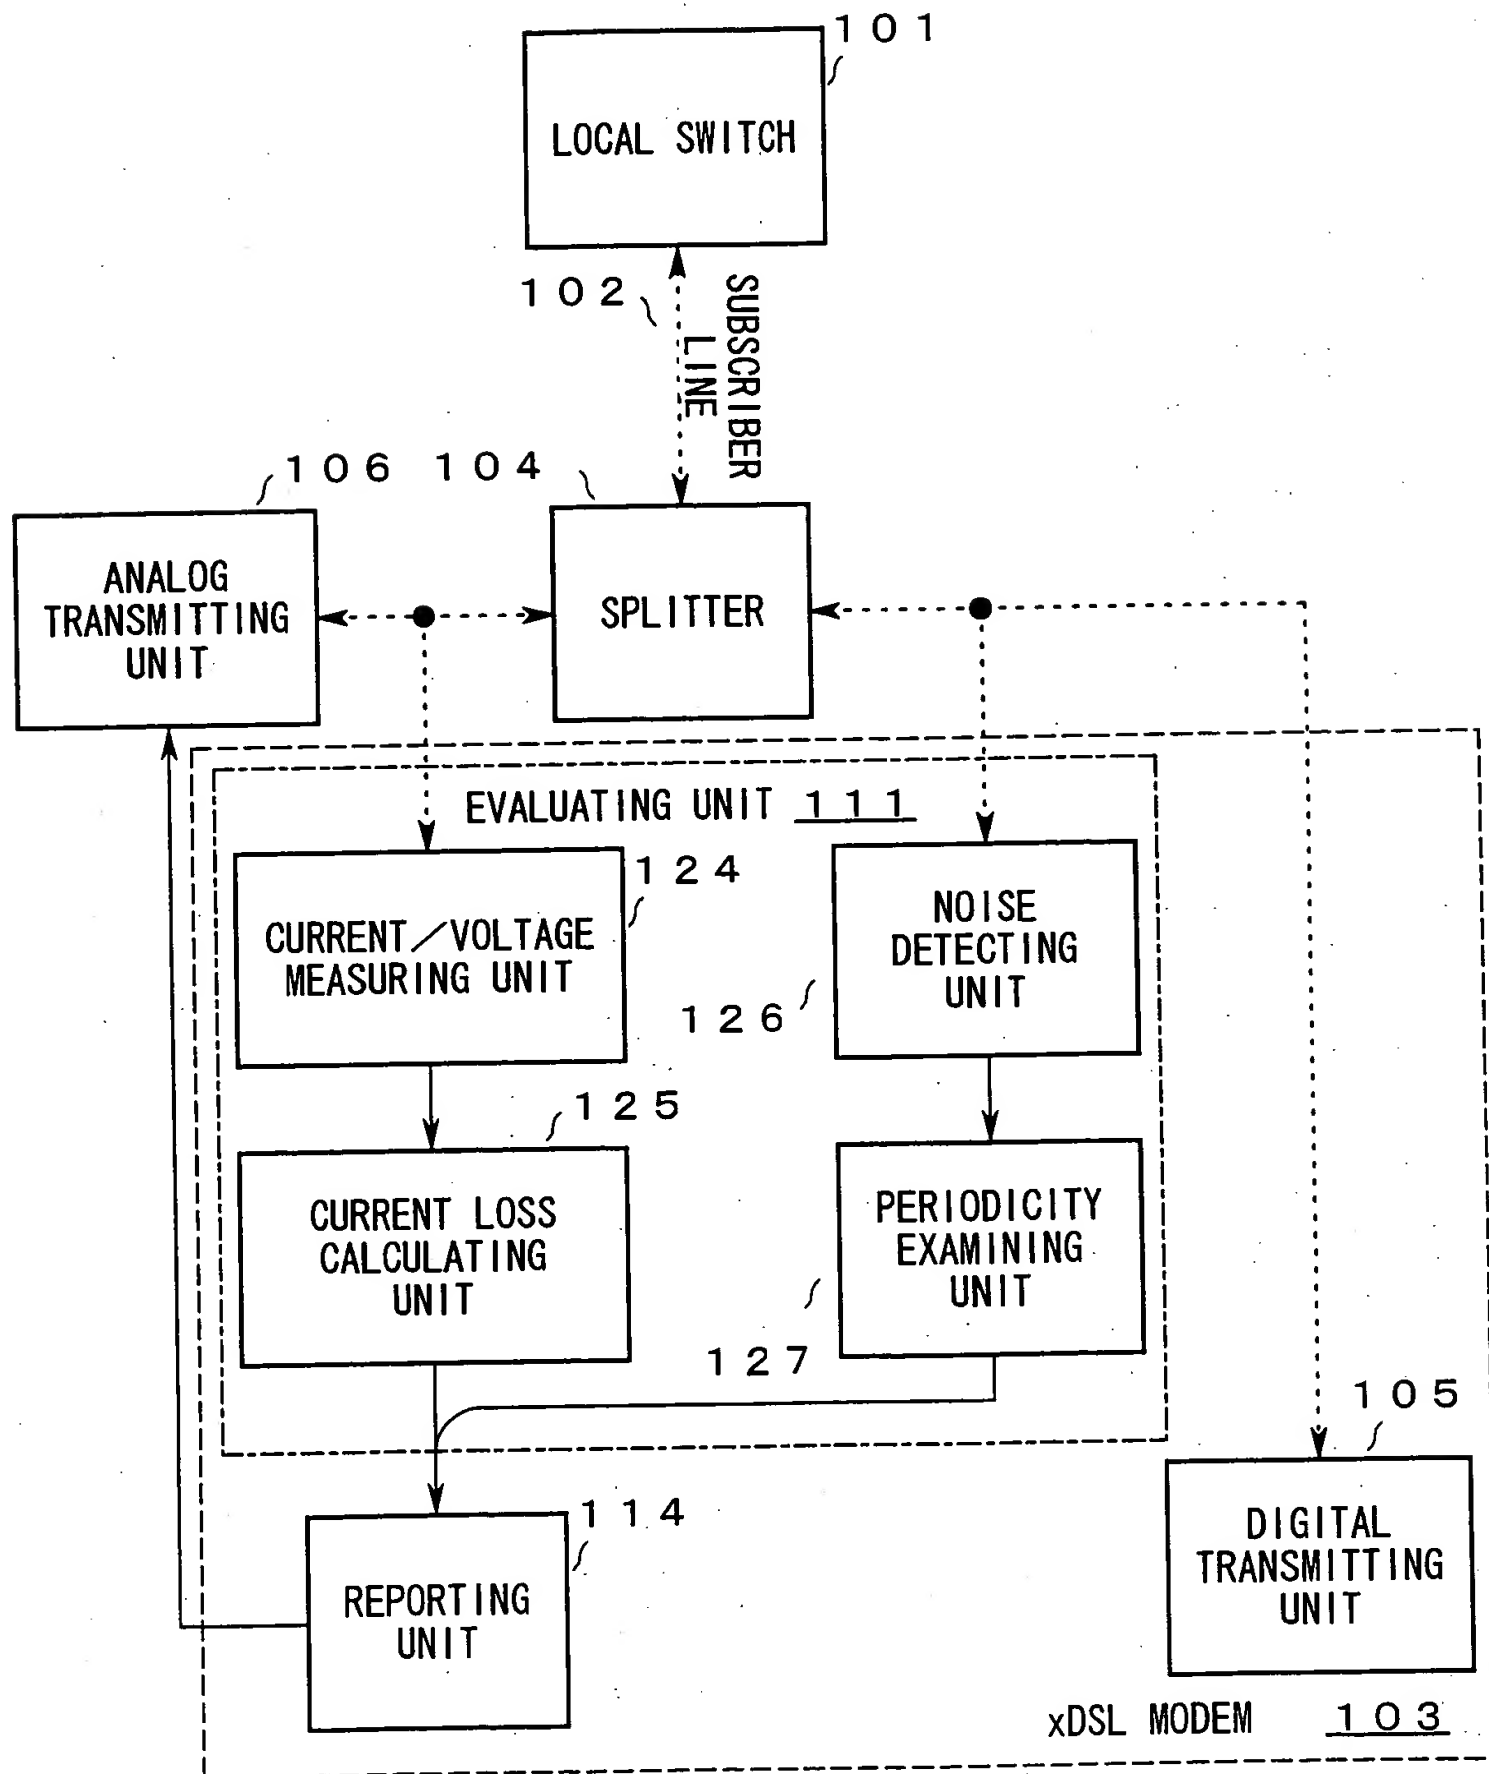


Fig. 3

Diagram showing embodiment of an xDSL modem
according to the present invention

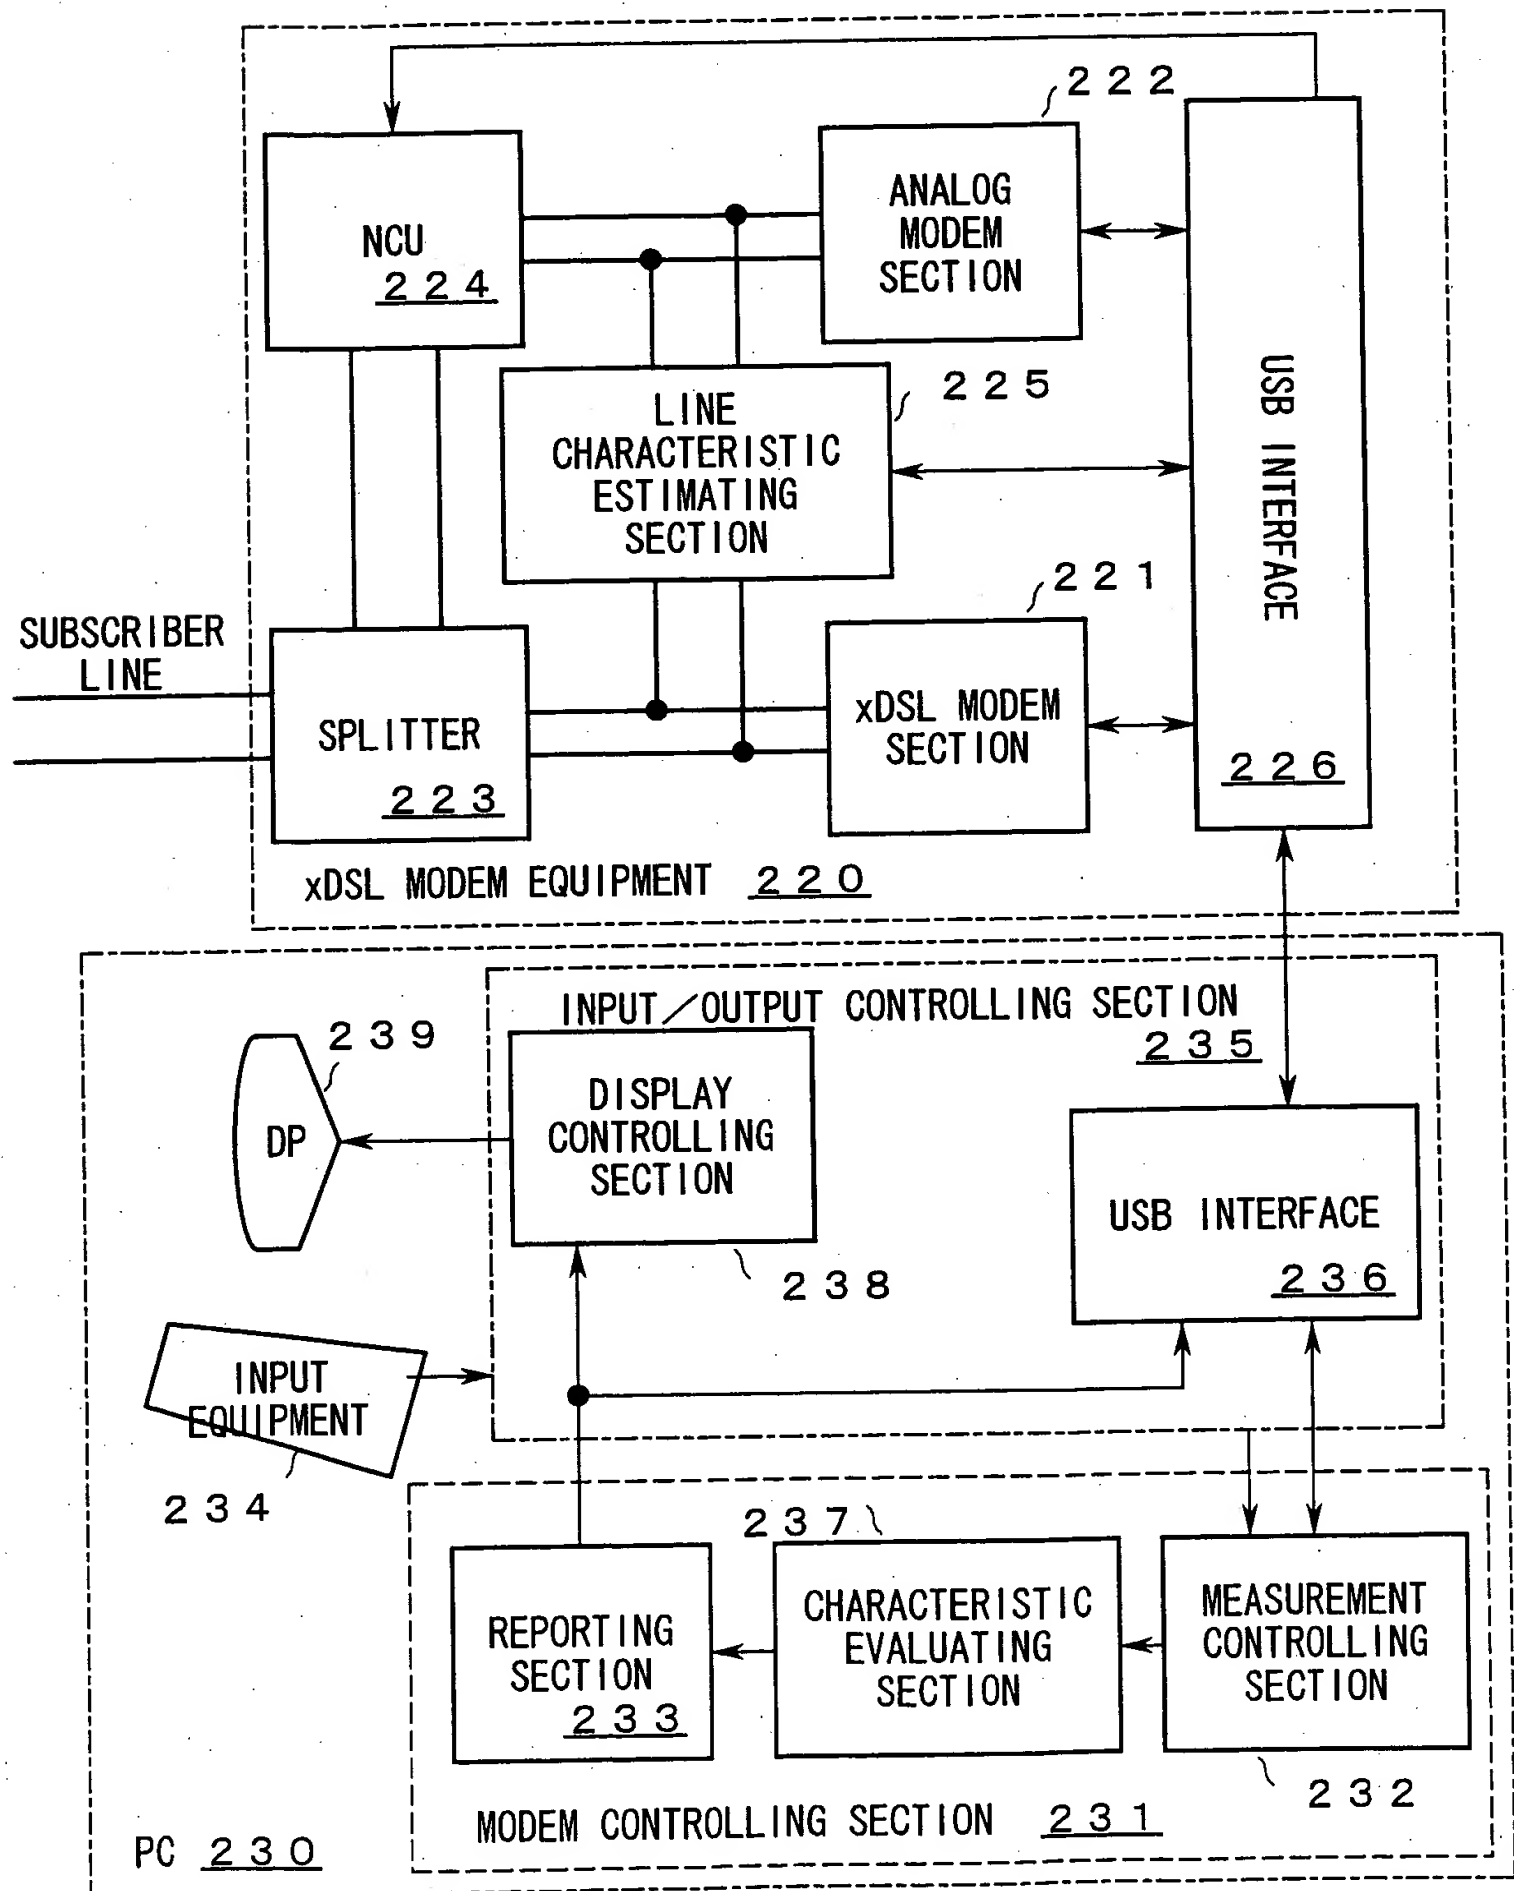


Fig. 4

Diagram showing a detailed constitution of the Line characteristic estimating section

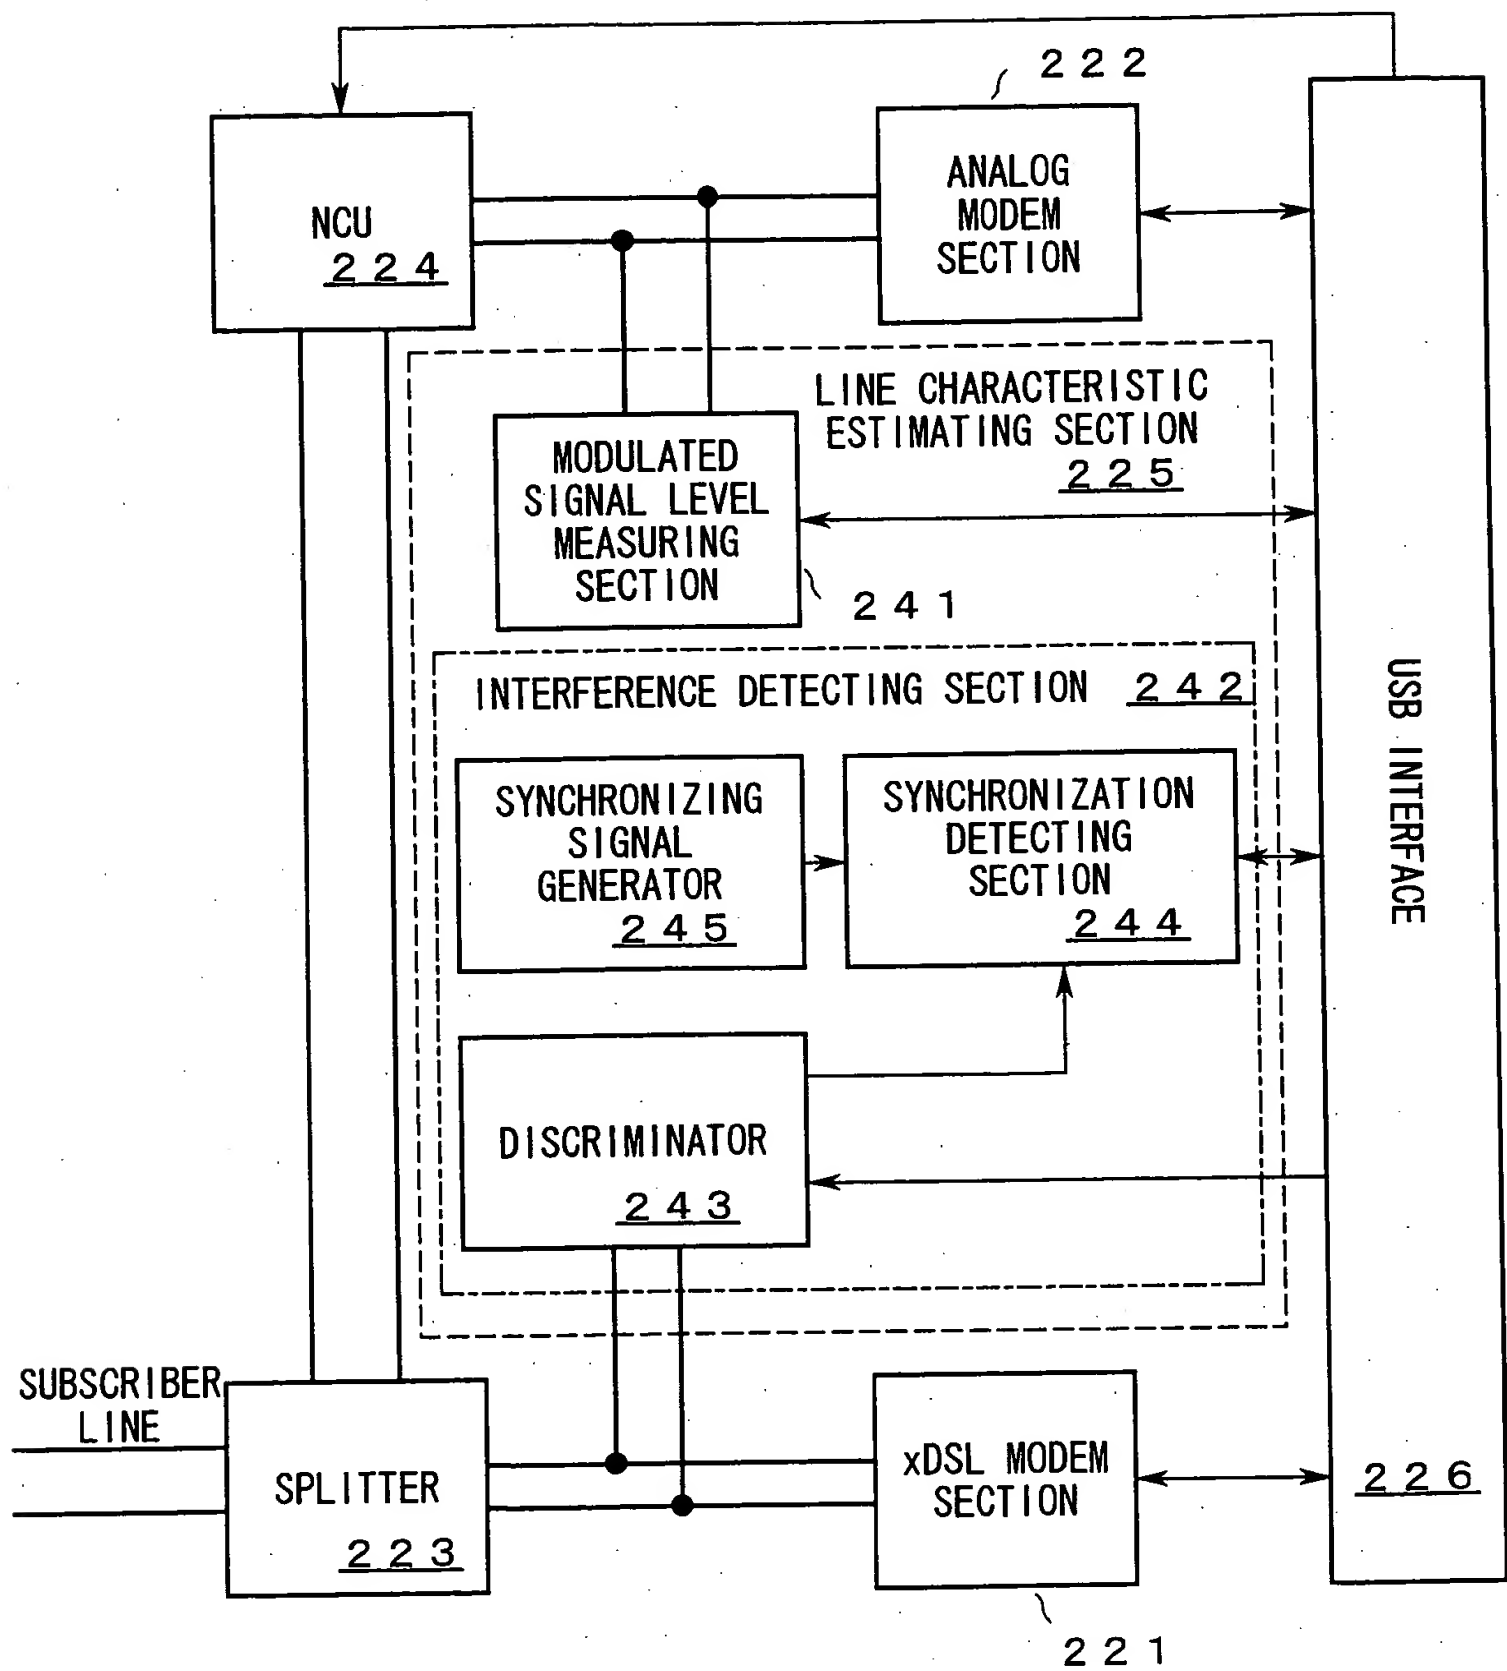


Fig. 5

Sequence diagram for explaining an operation to measure a line characteristic

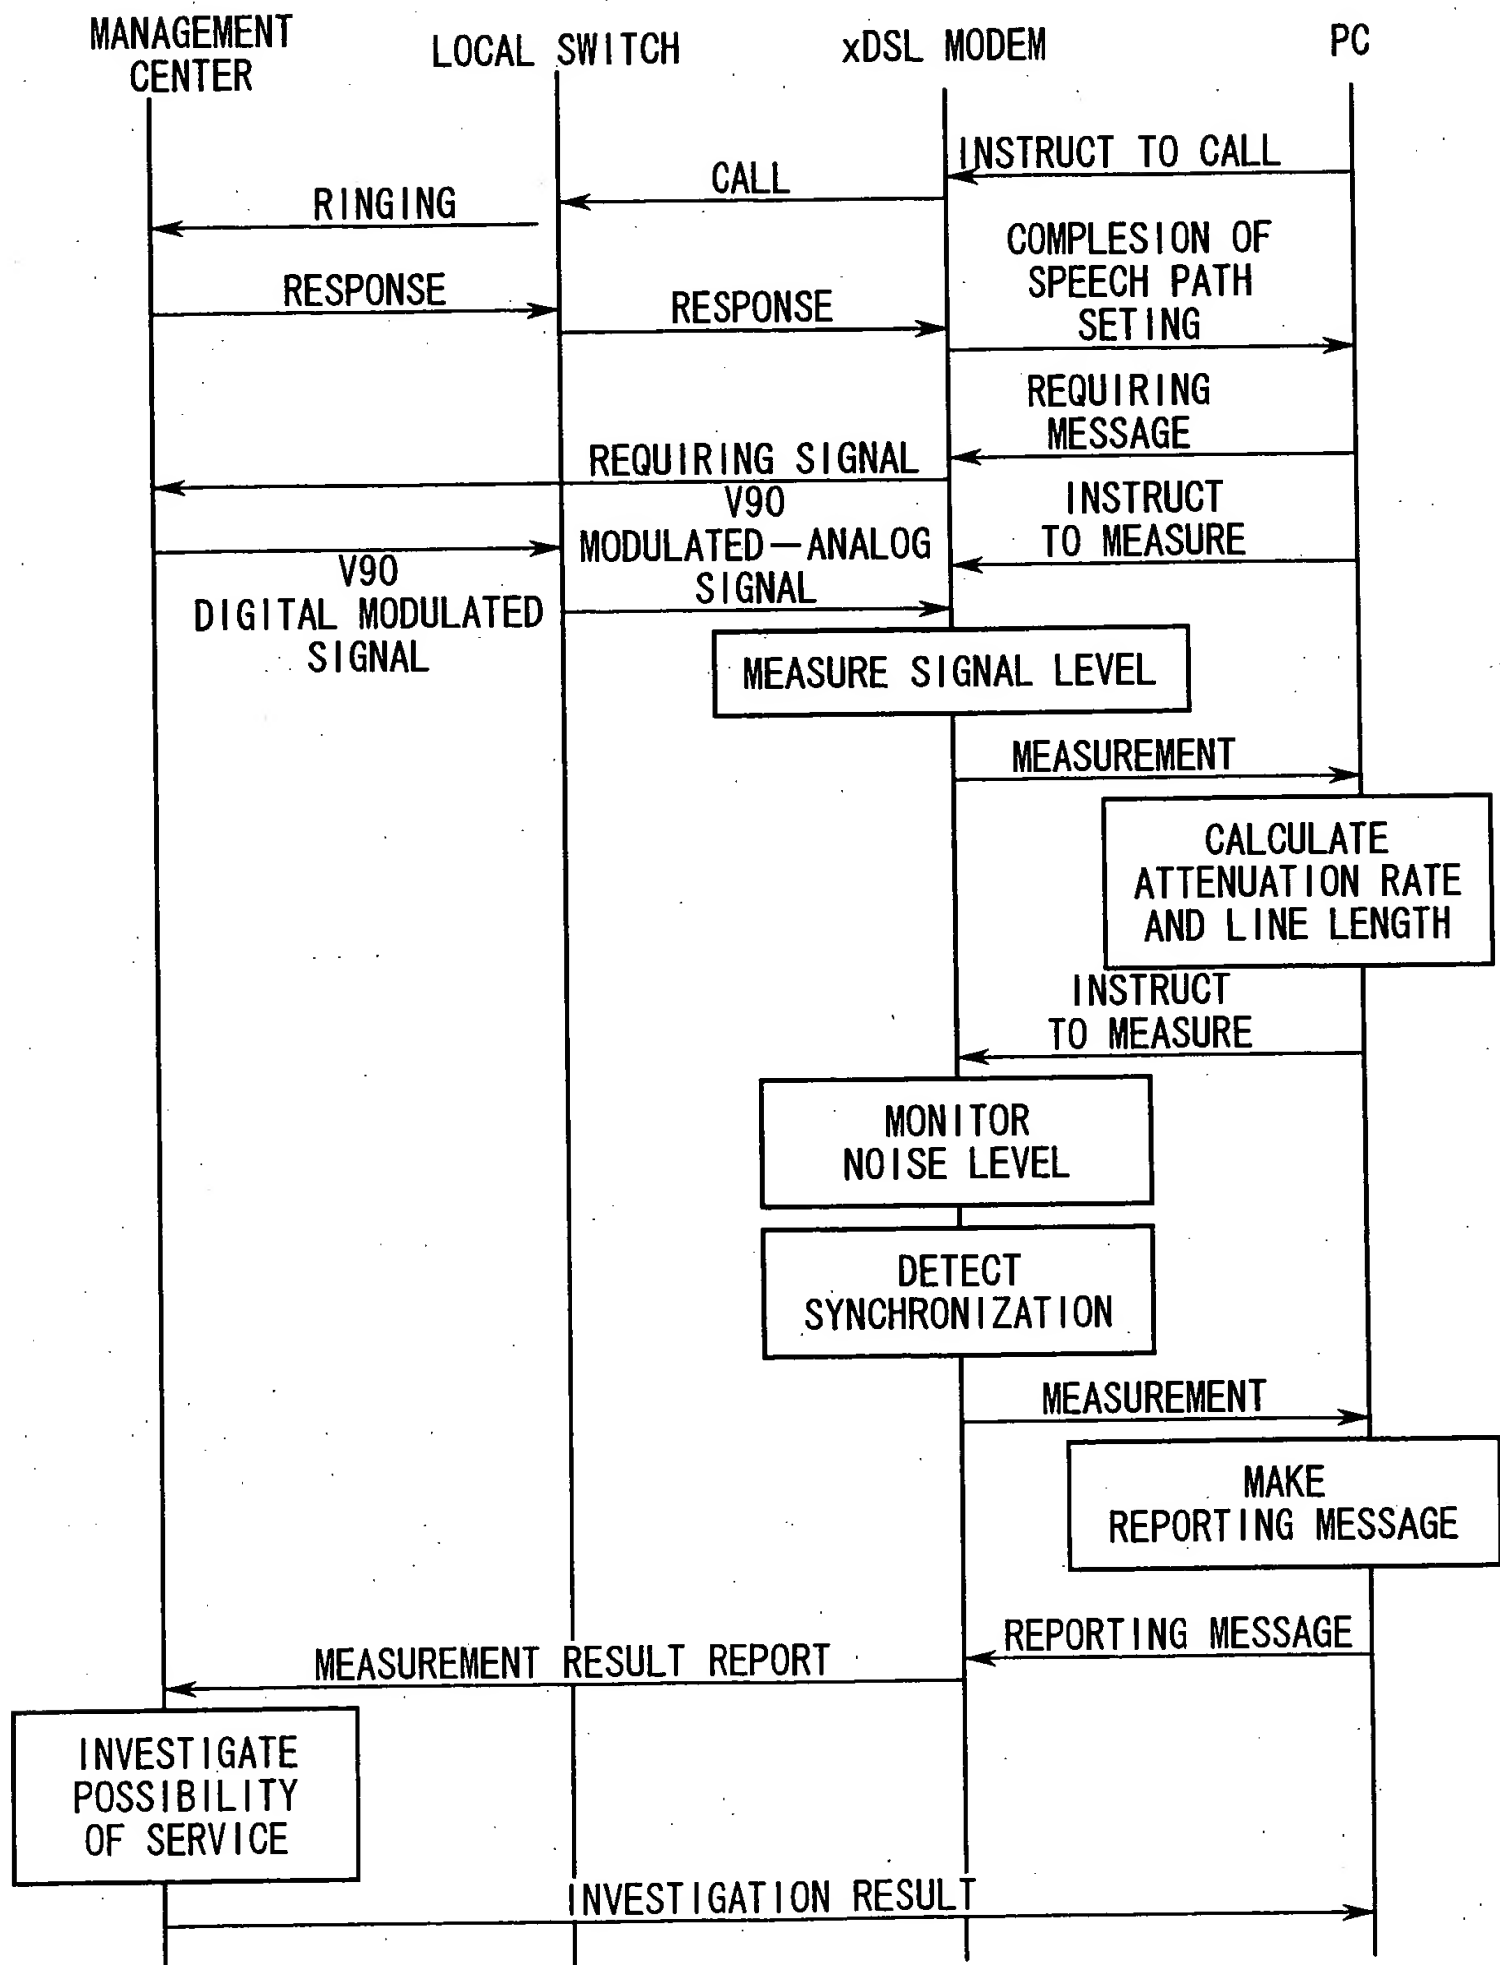


Fig. 6

Flowchart illustrating the operation to measure the line characteristic

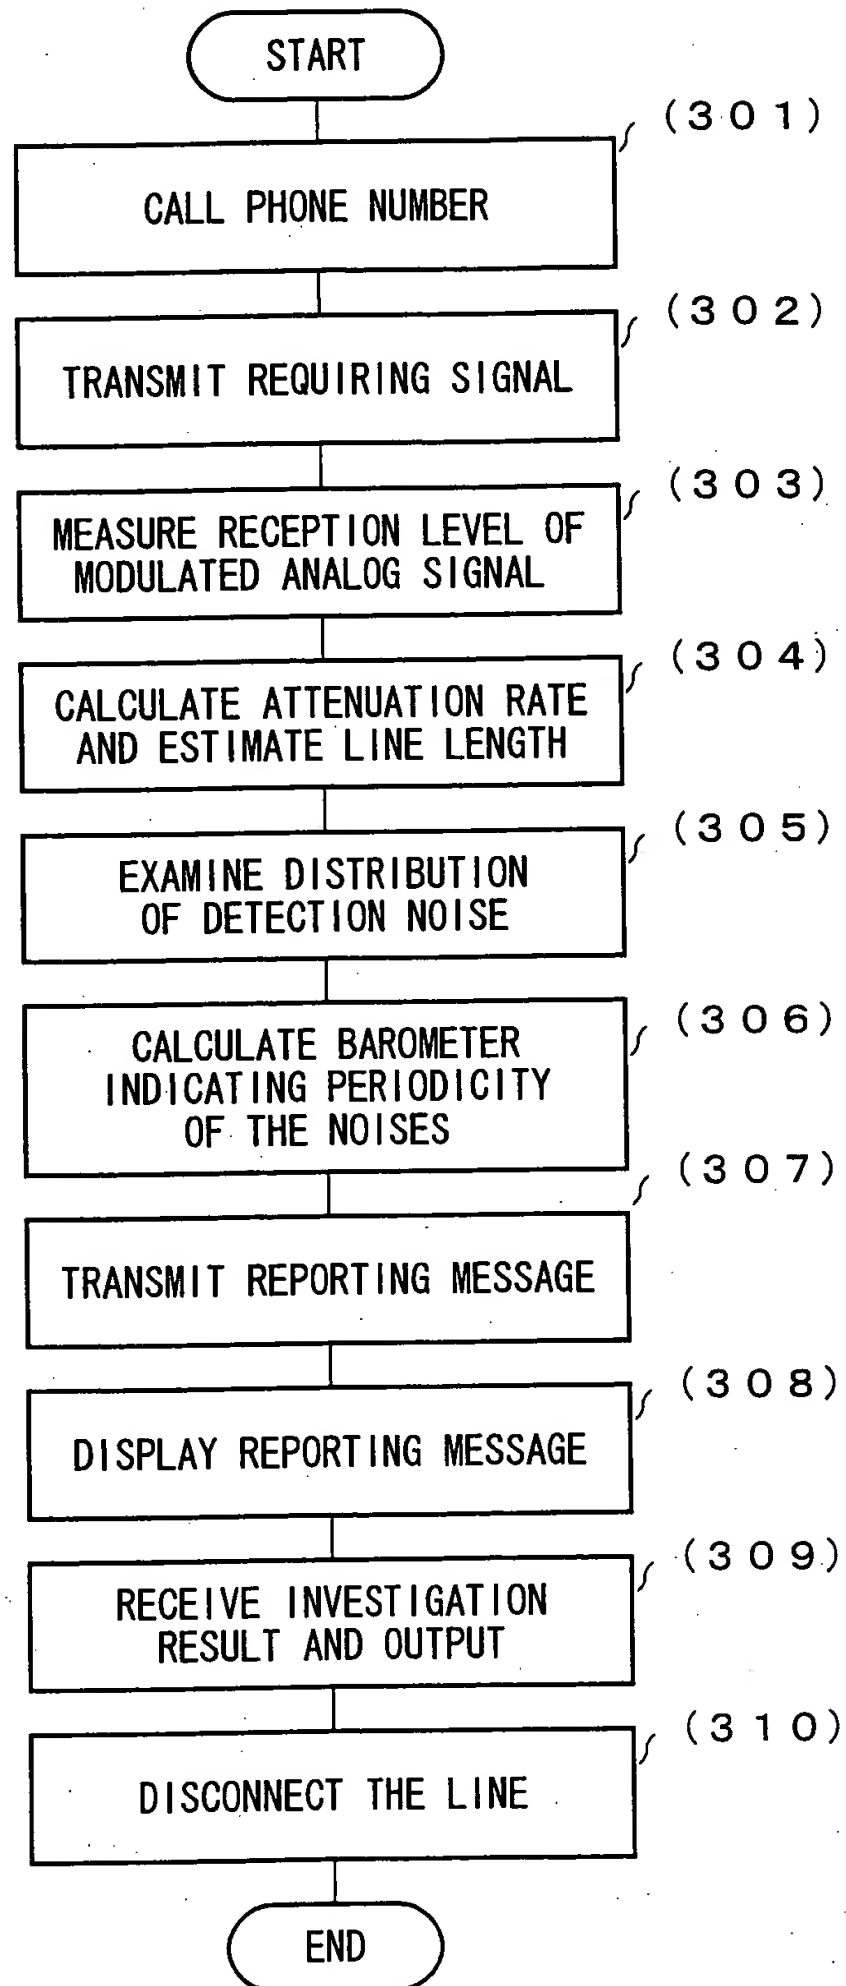


Fig. 7

Block diagram showing a second embodiment of the xDSL modem
according to the present invention

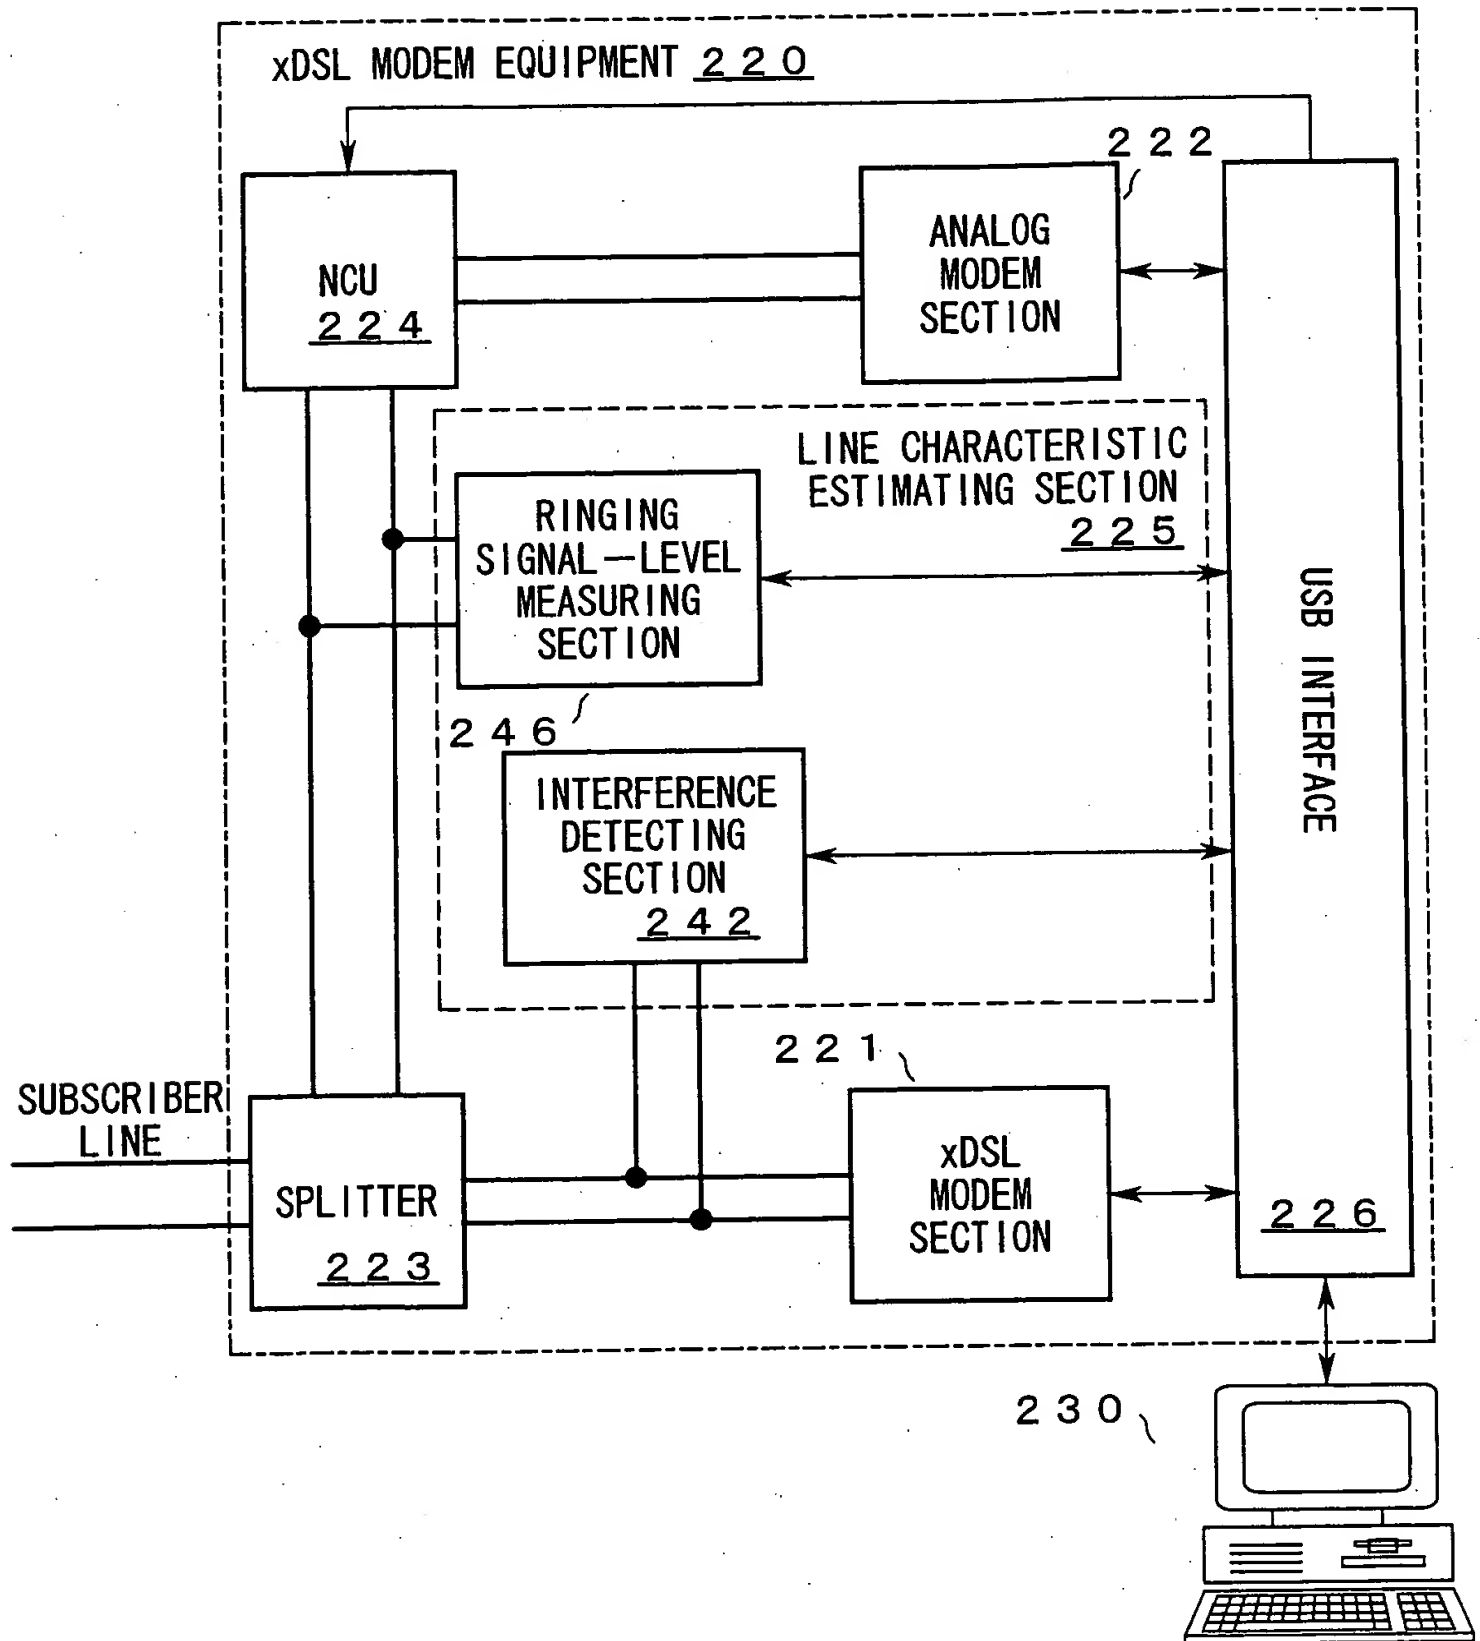


Fig. 8

Block diagram showing a third embodiment of the xDSL modem

according to the present invention

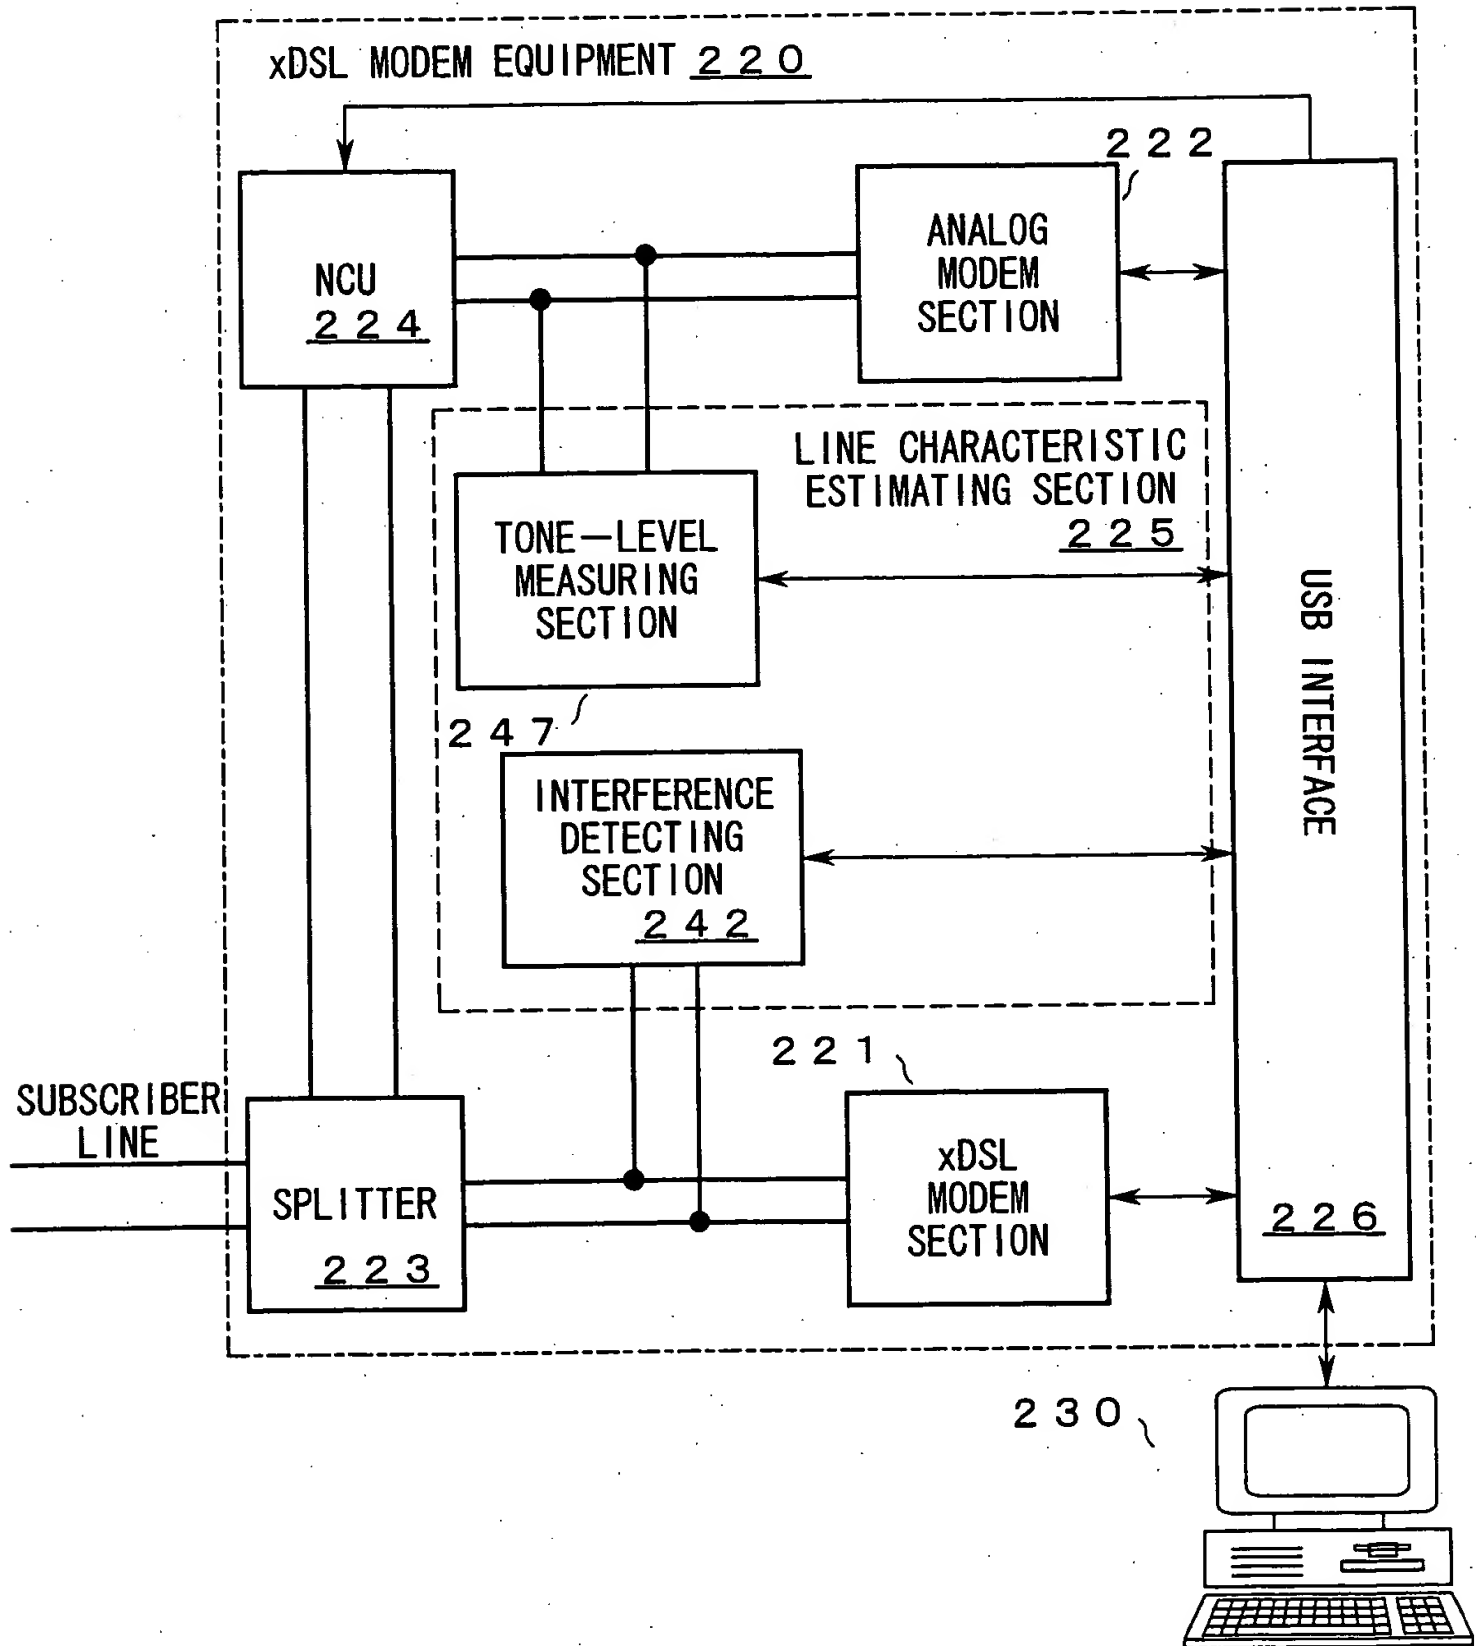


Fig. 9

Block diagram showing a fourth embodiment of the xDSL modem

according to the present invention

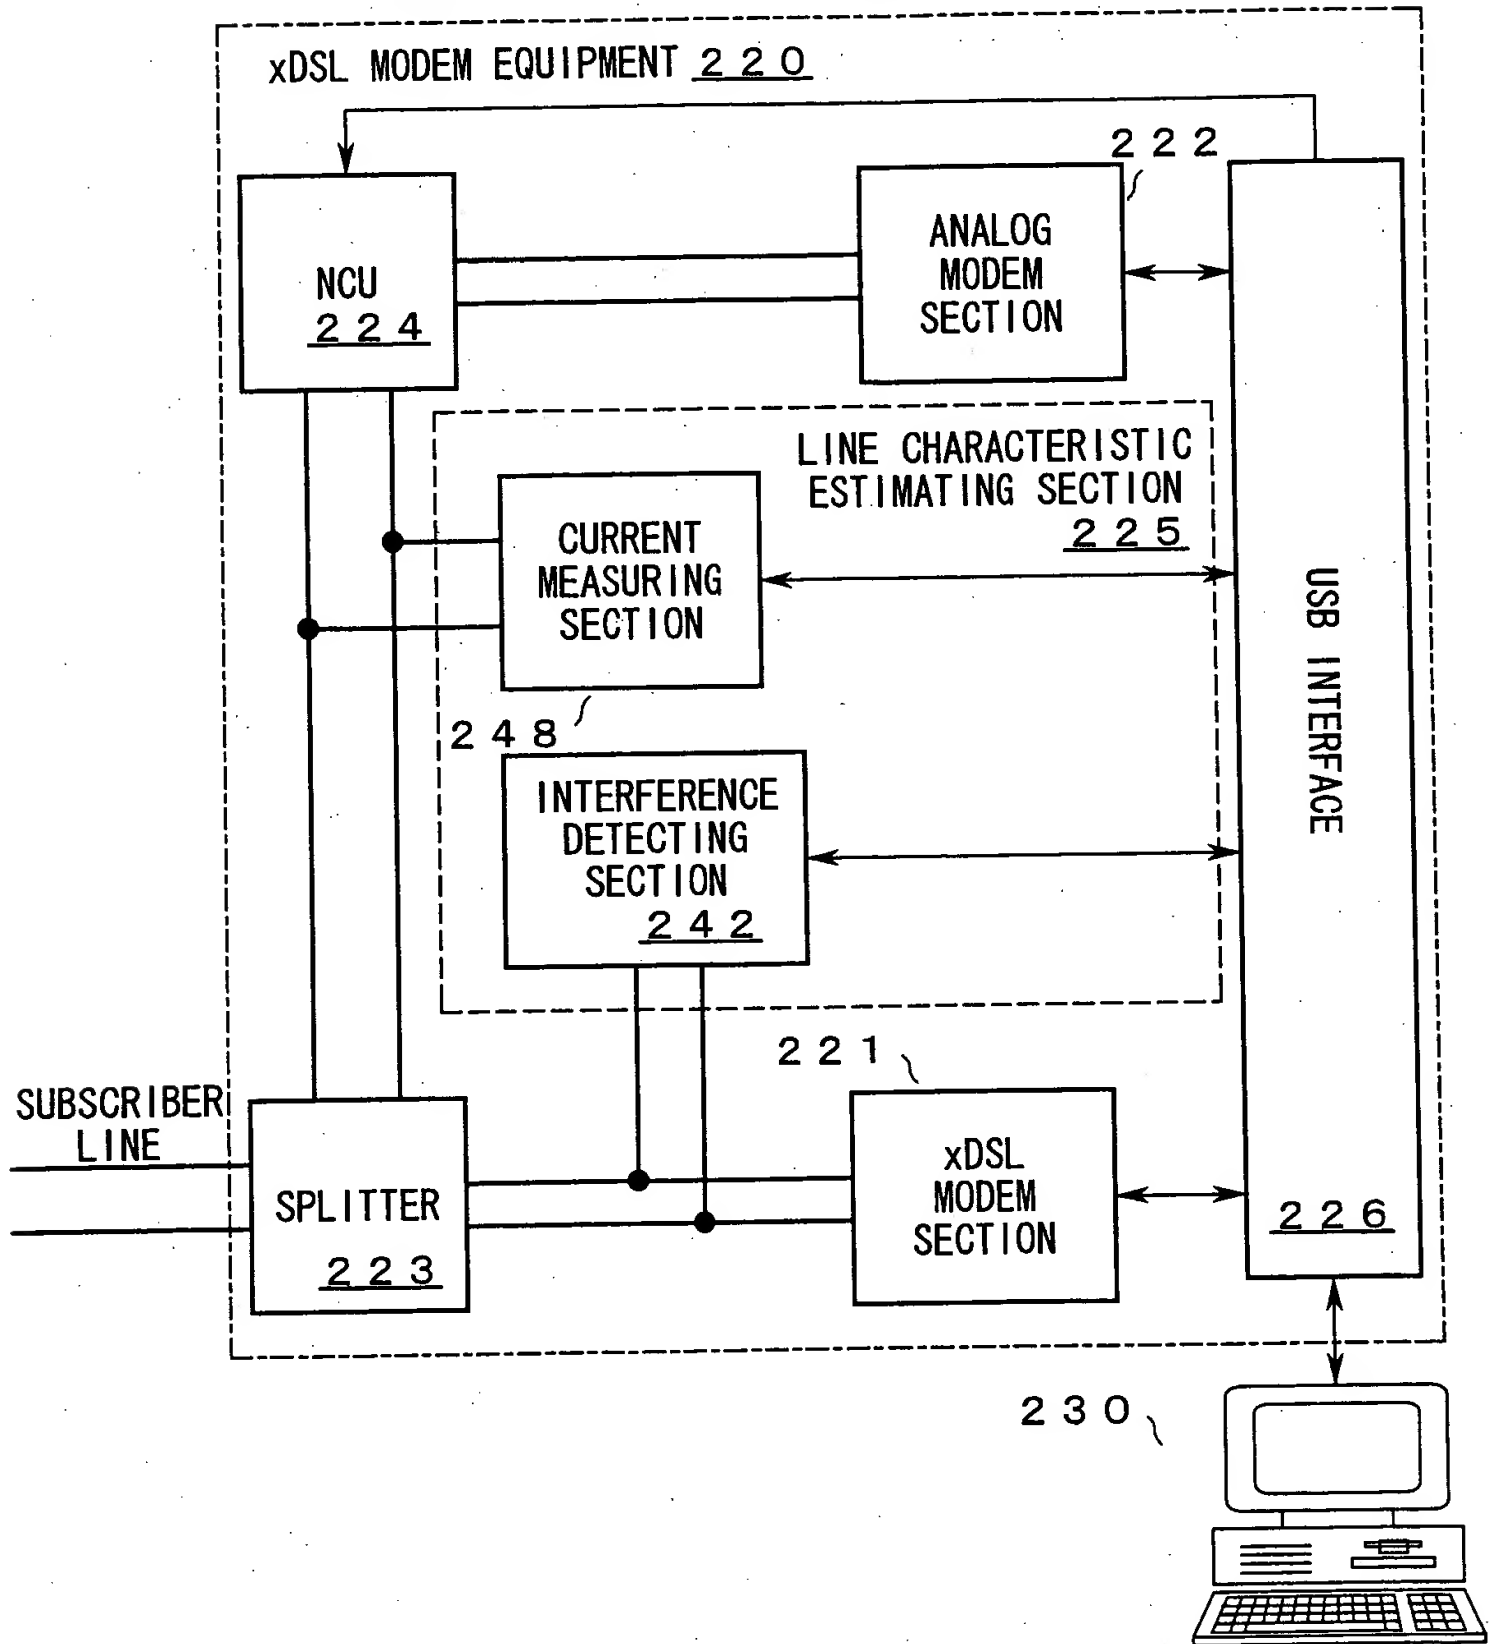


Fig. 10

Block diagram showing a constitution example of a communication system

for providing a broadband communication service by ADSL

